



Test Report: HRP-300N3-24

300W Ultra-High Peak Power Supply

■ DESIGN VERIFY TEST

- Output Function Test
- Input Function Test
- Protection Function Test
- Control Function Test
- Component Stress Test

■ SAFETY & E.M.C. TEST

- Safety Test
- E.M.C. Test

■ RELIABILITY TEST


- ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 21.6 V~ 28.8 V	I/P : 230VAC I/P : 115VAC O/P : MIN LOAD Ta : 25°C	20.108V~ 30.116V/230VAC 20.108V~ 30.116V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -1.0 % ~ +1.0 %	I/P: 85VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.03 % ~ 0.03 %
3	LINE REGULATION (Max)	V1: -0.2 % ~ +0.2 %	I/P: 85VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: -0.01% ~ 0.01%
4	LOAD REGULATION(Max)	V1: -0.5 % ~ +0.5 %	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.03 % ~ 0.03 %
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	1.3%
6	RIPPLE & NOISE(Max)	V1: 150mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 42mVp-p

high frequency :

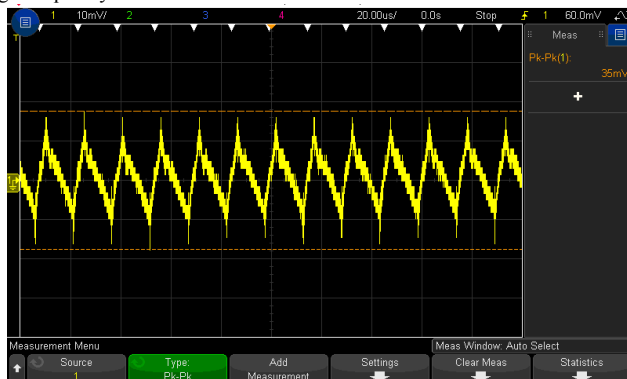


low frequency :

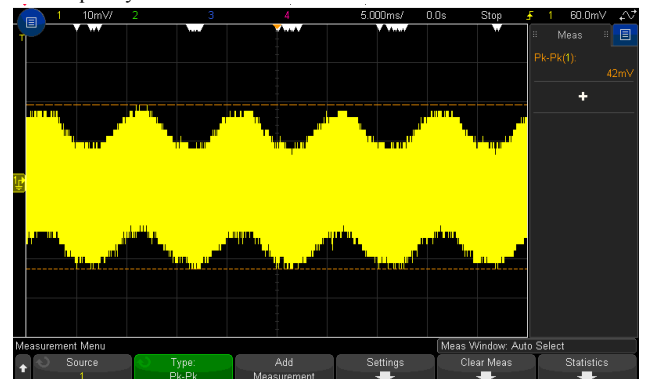


7	SET UP TIME(Max)	230VAC/ 1000ms 115VAC/2500ms	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 81.0 ms 115VAC/ 162 ms
---	------------------	---------------------------------	--	-----------------------------------

INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage CH3 : AC Input Voltage

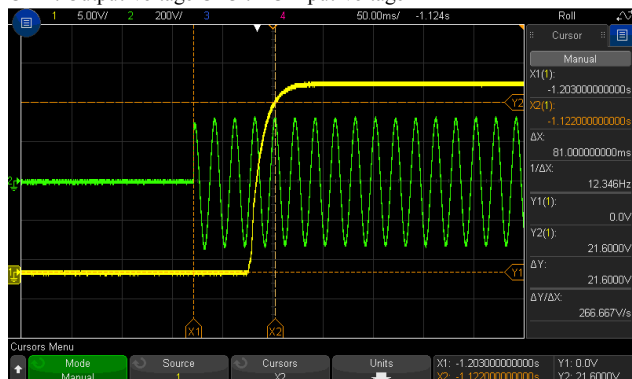

INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage CH3 : AC Input Voltage

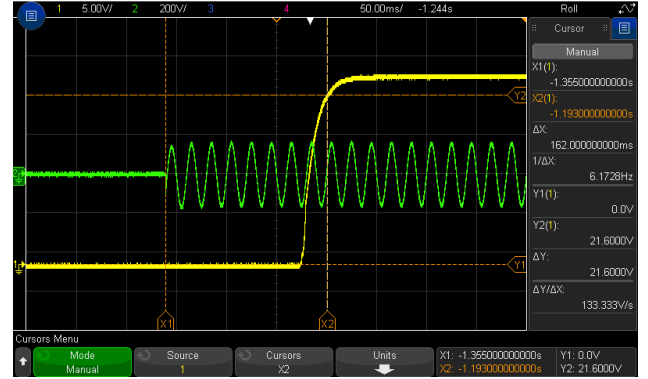

8	RISE TIME (Max)	230VAC/50ms 115VAC/50ms	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 21.75 ms 115VAC/ 21.78 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage		
9	HOLD UP TIME (Typ.)	230VAC/16ms 115VAC/16ms	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 38.0 ms 115VAC/ 38.6 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH3 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH3 : AC Input Voltage		
10	DYNAMIC LOAD	V1: 2400 mVp-p	I/P: 230VAC O/P: (1)FULL/50% LOAD 50%DUTY / 120HZ (2)FULL/50% LOAD 50%DUTY / 1KHZ Ta:25°C	760mVp-p 543mVp-p
FULL /50% LOAD 50%DUTY / 120HZ		FULL /50% LOAD 50%DUTY / 1KHZ		

11	TRANSIENT RECOVERY TIME	V1: 2400 mVp-p	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	454mVp-p
12	PEAK POWER	1 HOUR NO DAMAGE <p>Function Manual 1. Peak Power $P_{avg} = \frac{P_{pk} \times t + P_{non} \times (T-t)}{T} < P_{rated}$ Duty = $\frac{t}{T} \times 100\% < 35\%$ $t < 5 \text{ sec}$ <i>(a) If 3.5 times peak is required, please see below figure (t<5sec)</i></p> <p>Legend: P_{av}: Average output power (W) P_{pk}: Peak output power (W) P_{non}: Non peak output power(W) P_{rated}: Rated output power(W) t: Peak power width(sec) T: Period(sec)</p> <p>For example (24V model): V_{in}=230V Duty_{max}=10% P_{rated}=300W P_{pk}=800W t<5sec T=5sec $P_{av} = \frac{P_{pk} \times t + P_{non} \times (T-t)}{T} = \frac{800 \times 5 + P_{non} \times (50-5)}{50} < 330W$ P_{non} < 294.4W</p>	I/P : 200VAC I/P : 100VAC O/P:TESTING Ta:25°C	TEST:OK


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC 120VDC~ 370VDC	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL / 50% LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL / 50% LOAD Ta:25°C	(1) 81.1V~264V (2) 101.7Vdc~370Vdc/FULL LOAD 101.6Vdc~370Vdc/50% LOAD (3) 101.6Vdc~370Vdc/FULL LOAD 101.6Vdc~370Vdc/50% LOAD
			I/P: LOW-LINE-3V=97 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:85 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 1.8 A 115V/ 3.5A	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	I = 1.69A/ 230VAC I = 3.47A/ 115VAC
4	LEAKAGE CURRENT	< 2mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	1.386mA
5	POWER FACTOR (Typ.)	0.95/ 230VAC 0.99/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF= 0.987 /230VAC PF= 0.995 /115VAC
	P.F vs LOAD			




300W Ultra-High Peak Power Supply

HRP-300N3 series

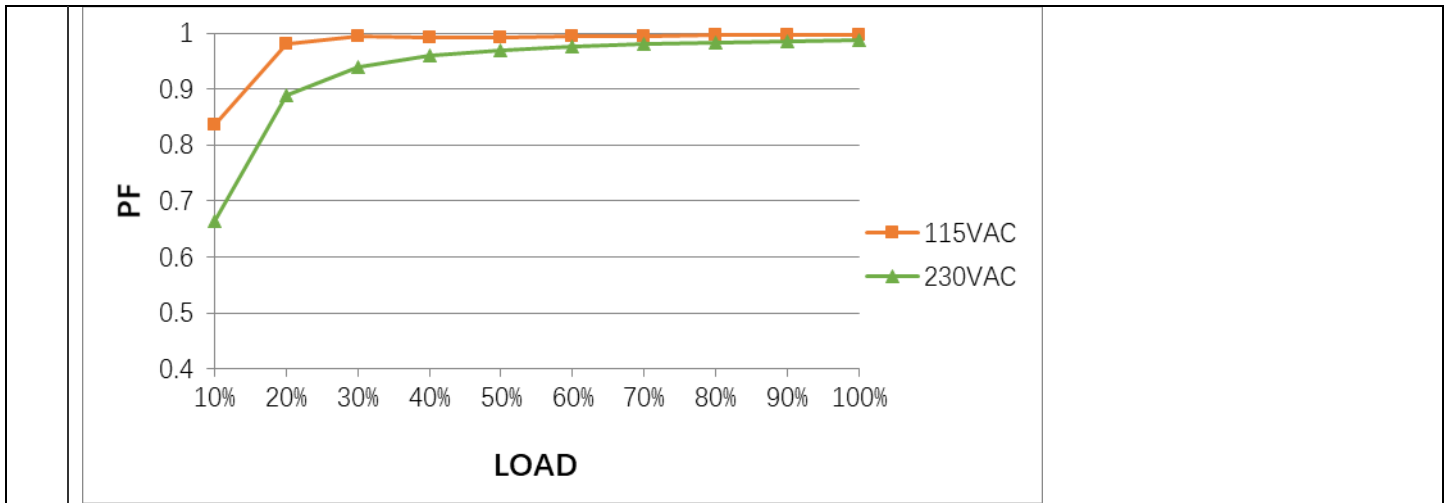


6	EFFICIENCY(Typ.)	87%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	87.9 %
---	------------------	-----	---	--------

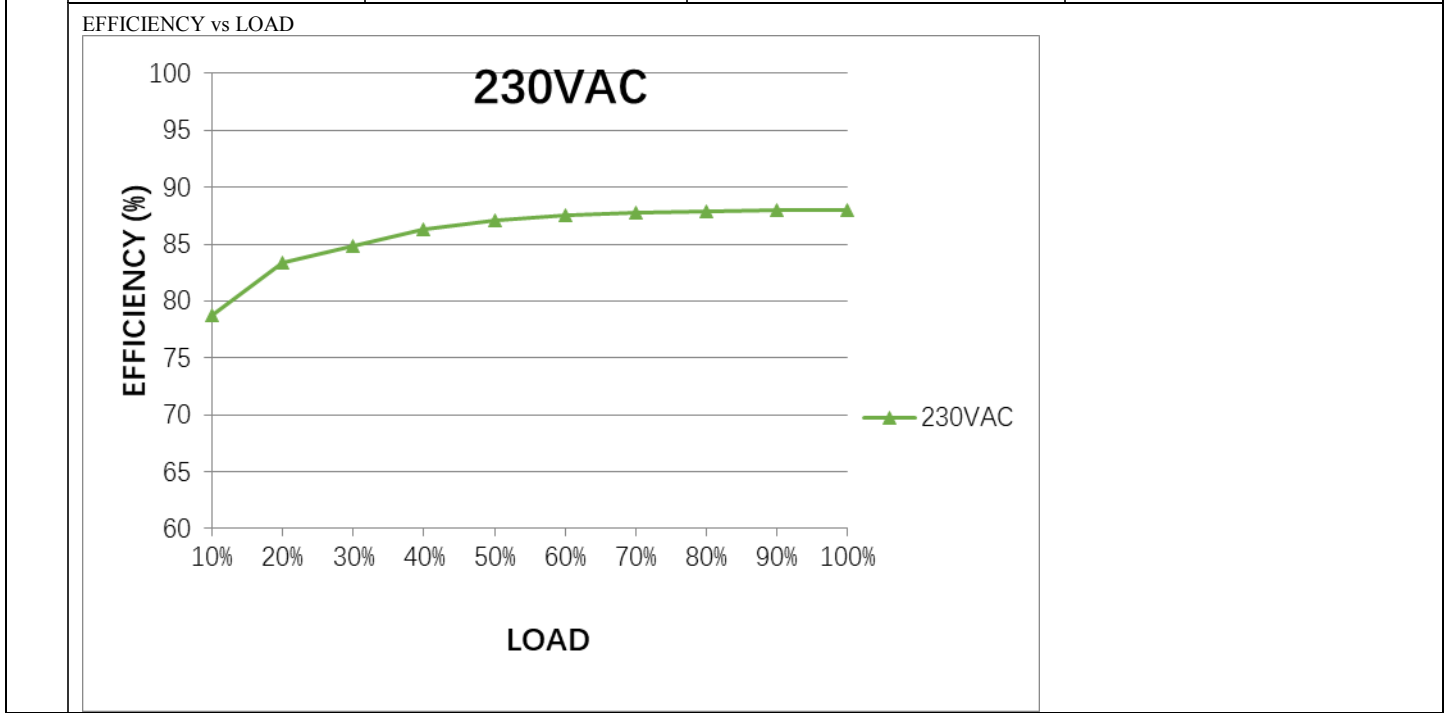

7	INRUSH CURRENT(Typ.)	230V/75A 115V/35A COLD START	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	I = 61.4 A/ 230VAC I = 21.3 A/ 115VAC T50=1060 us/230V
---	----------------------	------------------------------------	--	--

INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current		INPUT=115VAC/ 60HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current	
---	--	--	--

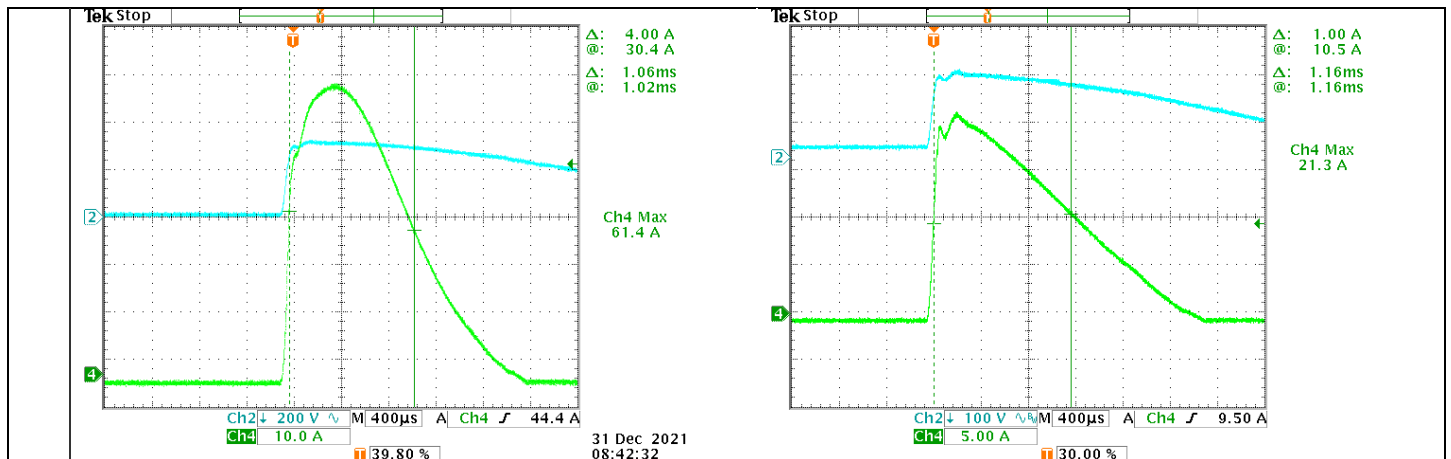

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	Output power >105% rated for more than 5 seconds then shut down o/p voltage, re-power on to recover Constant current limiting for output power >380% (1140W) rated for more than 5 seconds and then shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	111.5%/ 264VAC 119.3%/ 230VAC 119.3%/ 100VAC 5S TEST: OK PROTECTION TYPE : Output power >105% rated for more than 5 seconds then shut down o/p voltage, re-power on to recover Constant current limiting for output power >380% (1140W) rated for more than 5 seconds and then shut down o/p voltage, re-power on to recover
2	OVER VOLTAGE PROTECTION	30V~34.8V Protection type : Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta: 25°C	32.3V/ 264VAC 32.3V/ 230VAC 32.3V/ 85VAC PROTECTION TYPE : OK Shut down o/p voltage , re-power on to recover .
3	OVER TEMPERATURE PROTECTION	Protection type : TSW1: Shut down o/p voltage , recovers automatically after temperature goes down . RTH3: Shut down o/p voltage , re-power on to recover	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active PROTECTION TYPE : OK TSW1: Shut down o/p voltage , recovers automatically after temperature goes down . RTH3: Shut down o/p voltage , re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE PROTECTION TYPE : OK Constant current limiting, and shut down after 5 seconds , re-power on to recover .

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	REMOTE SENSE	S+ / S- >0.3V Compensate voltage drop on the load wiring up to 0.3V.	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	0.56V



2	DC OK SIGNAL	High (3.3 ~ 5.6V) :PSU turn on Low (0 ~ 1V) : PSU turn off. I/P: 230 VAC O/P:FULL LOAD Ta:25°C Test Result : <table border="1" data-bbox="625 407 1136 501"> <tr> <th>Vout</th> <th>DC OK SIGNAL</th> </tr> <tr> <td>PSU turn on</td> <td>5.155V</td> </tr> <tr> <td>PSU turn off</td> <td>0.013V</td> </tr> </table>	Vout	DC OK SIGNAL	PSU turn on	5.155V	PSU turn off	0.013V		
Vout	DC OK SIGNAL									
PSU turn on	5.155V									
PSU turn off	0.013V									
3	FAN ON/OFF CONTROL	Load 35±15% or RTH2≥50°C FAN ON	I/P: 230VAC O/P:TESTING	<table border="1" data-bbox="1189 548 1524 616"> <tr> <td></td> <td>RTH(°C)</td> <td>LOAD(%)</td> </tr> <tr> <td>FAN ON</td> <td>OK</td> <td>33%</td> </tr> </table>		RTH(°C)	LOAD(%)	FAN ON	OK	33%
	RTH(°C)	LOAD(%)								
FAN ON	OK	33%								

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																				
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 3/Q4 Rated : 18 A/ 600 V	AC ON/OFF I/P: High-Line =300V VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8)Peak Load (350%) Ta:25°C	<table border="0"> <tr> <td>Q3</td> <td>Q4</td> </tr> <tr> <td>VDS:</td> <td>VDS:</td> </tr> <tr> <td>(1) 544V</td> <td>(1) 548V</td> </tr> <tr> <td>(2) 556V</td> <td>(2) 548V</td> </tr> <tr> <td>(3) 544V</td> <td>(3) 540V</td> </tr> <tr> <td>(4) 548V</td> <td>(4) 548V</td> </tr> <tr> <td>(5) 540V</td> <td>(5) 548V</td> </tr> <tr> <td>(6) 540V</td> <td>(6) 544V</td> </tr> <tr> <td>(7) 556V</td> <td>(7) 552V</td> </tr> <tr> <td>(8) 540V</td> <td>(8) 552V</td> </tr> </table>	Q3	Q4	VDS:	VDS:	(1) 544V	(1) 548V	(2) 556V	(2) 548V	(3) 544V	(3) 540V	(4) 548V	(4) 548V	(5) 540V	(5) 548V	(6) 540V	(6) 544V	(7) 556V	(7) 552V	(8) 540V	(8) 552V
Q3	Q4																							
VDS:	VDS:																							
(1) 544V	(1) 548V																							
(2) 556V	(2) 548V																							
(3) 544V	(3) 540V																							
(4) 548V	(4) 548V																							
(5) 540V	(5) 548V																							
(6) 540V	(6) 544V																							
(7) 556V	(7) 552V																							
(8) 540V	(8) 552V																							
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated : 34 A/ 600 V	I/P: High-Line =267V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8)Peak Load (350%) Ta:25°C	<table border="0"> <tr> <td>Q1</td> </tr> <tr> <td>VDS:</td> </tr> <tr> <td>(1) 480V</td> </tr> <tr> <td>(2) 480V</td> </tr> <tr> <td>(3) 484V</td> </tr> <tr> <td>(4) 488V</td> </tr> <tr> <td>(5) 484V</td> </tr> <tr> <td>(6) 488V</td> </tr> <tr> <td>(7) 472V</td> </tr> <tr> <td>(8) 484V</td> </tr> </table>	Q1	VDS:	(1) 480V	(2) 480V	(3) 484V	(4) 488V	(5) 484V	(6) 488V	(7) 472V	(8) 484V										
Q1																								
VDS:																								
(1) 480V																								
(2) 480V																								
(3) 484V																								
(4) 488V																								
(5) 484V																								
(6) 488V																								
(7) 472V																								
(8) 484V																								
3	P.F.C DIODE	D1 Rated :8A/ 600 V	I/P: High-Line =267V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5)Peak Load (350%) Ta:25°C	<table border="0"> <tr> <td>(1) 412V</td> </tr> <tr> <td>(2) 408V</td> </tr> <tr> <td>(3) 416V</td> </tr> <tr> <td>(4) 416V</td> </tr> <tr> <td>(5) 416V</td> </tr> </table>	(1) 412V	(2) 408V	(3) 416V	(4) 416V	(5) 416V															
(1) 412V																								
(2) 408V																								
(3) 416V																								
(4) 416V																								
(5) 416V																								

4	Diode Peak Voltage	<p>Q101 Rated :20 A/ 200 V</p> <p>Q103 Rated :20 A/200 V</p>	<p>AC ON/OFF</p> <p>I/P: High-Line =300V</p> <p>Vomax</p> <p>O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9)Peak Load (350%)</p> <p>Vo: O/P: (1)Full Load Ta: 25°C</p>	<p>Q101: Vomax VDS: (1) 168V (2) 168V (3) 169V (4) 170V (5) 170V (6) 168V (7) 168V (8) 109V (9) 117V Vo: (1) 166V</p> <p>Q103: Vomax VDS: (1) 189V (2) 193V (3) 192V (4) 192V (5) 192V (6) 190V (7) 190V (8) 179V (9) 192V Vo: (1) 190V</p>
5	Input Capacitor Voltage	C5 Rated: :150 μ / 400 V	<p>I/P High-Line =267V</p> <p>O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue (5)Peak Load on/off (350%) (6)Peak Load continue (350%)</p> <p>Ta:25°C</p>	<p>(1) 383V (2) 383V (3) 399V (4) 383V (5) 399V (6) 399V</p>
6	Control IC Voltage Test	<p>PWM IC U1 Rated 11V~ 30 V</p> <p>O/P IC U201 Rated 3 V~ 30 V</p>	<p>AC ON/OFF</p> <p>I/P: High-Line =300V</p> <p>O/P: (1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. (5) NO LOAD VRmin (LOW LINE)</p> <p>Ta:25°C</p>	<p>U1 (1) 15.5V (2) 15.2V (3) 15.2V (4) 15.2V (5) 14.5V</p> <p>U110 (1) 16.6V (2) 12.3V (3) 16.4V (4) 15.8V (5) 15.2V</p> <p>U201 (1) 12.3V (2) 12.4V (3) 12.3V (4) 19.3V (5) 11.8V</p>

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG :2KVAC/min O/P-FG:0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:0.6 KVAC/min Ta:25°C	I/P-O/P: 6.59mA I/P-FG:5.85mA O/P-FG:6.51mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P:9999MΩ I/P-FG:9999MΩ O/P-FG:9999MΩ NO DAMAGE

		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 25.8 °C</th> <th>HIGH AMBIENT Ta= 50.9 °C</th> </tr> </thead> <tbody> <tr><td>13</td><td>C5</td><td>35.9°C</td><td>63.3°C</td></tr> <tr><td>14</td><td>U1</td><td>42.0°C</td><td>69.6°C</td></tr> <tr><td>15</td><td>T2</td><td>42.4°C</td><td>70.4°C</td></tr> <tr><td>16</td><td>Q3</td><td>55.9°C</td><td>84.3°C</td></tr> <tr><td>17</td><td>Q4</td><td>48.4°C</td><td>77.6°C</td></tr> <tr><td>18</td><td>T1 Core</td><td>71.7°C</td><td>100.5°C</td></tr> <tr><td>19</td><td>T1 Coil</td><td>55.0°C</td><td>82.9°C</td></tr> <tr><td>20</td><td>Q101</td><td>51.0°C</td><td>77.5°C</td></tr> <tr><td>21</td><td>Q104</td><td>45.5°C</td><td>72.4°C</td></tr> <tr><td>22</td><td>L100</td><td>59.0°C</td><td>87.6°C</td></tr> <tr><td>23</td><td>C105</td><td>37.8°C</td><td>65.4°C</td></tr> <tr><td>24</td><td>C107</td><td>32.2°C</td><td>58.7°C</td></tr> <tr><td>25</td><td>U201</td><td>32.6°C</td><td>60.4°C</td></tr> <tr><td>26</td><td>J111</td><td>36.9°C</td><td>63.7°C</td></tr> <tr><td>27</td><td>ZD103</td><td>45.7°C</td><td>74.3°C</td></tr> <tr><td>28</td><td>ZD102</td><td>40.5°C</td><td>68.8°C</td></tr> <tr><td>29</td><td>R105</td><td>49.0°C</td><td>77.1°C</td></tr> <tr><td>30</td><td>D30</td><td>41.3°C</td><td>68.6°C</td></tr> <tr><td>31</td><td>U110</td><td>34.8°C</td><td>61.8°C</td></tr> <tr><td>32</td><td>U2</td><td>37.5°C</td><td>65.2°C</td></tr> <tr><td>33</td><td>RTH3</td><td>60.1°C</td><td>89.0°C</td></tr> </tbody> </table>				NO	Position	ROOM AMBIENT Ta= 25.8 °C	HIGH AMBIENT Ta= 50.9 °C	13	C5	35.9°C	63.3°C	14	U1	42.0°C	69.6°C	15	T2	42.4°C	70.4°C	16	Q3	55.9°C	84.3°C	17	Q4	48.4°C	77.6°C	18	T1 Core	71.7°C	100.5°C	19	T1 Coil	55.0°C	82.9°C	20	Q101	51.0°C	77.5°C	21	Q104	45.5°C	72.4°C	22	L100	59.0°C	87.6°C	23	C105	37.8°C	65.4°C	24	C107	32.2°C	58.7°C	25	U201	32.6°C	60.4°C	26	J111	36.9°C	63.7°C	27	ZD103	45.7°C	74.3°C	28	ZD102	40.5°C	68.8°C	29	R105	49.0°C	77.1°C	30	D30	41.3°C	68.6°C	31	U110	34.8°C	61.8°C	32	U2	37.5°C	65.2°C	33	RTH3	60.1°C	89.0°C
NO	Position	ROOM AMBIENT Ta= 25.8 °C	HIGH AMBIENT Ta= 50.9 °C																																																																																										
13	C5	35.9°C	63.3°C																																																																																										
14	U1	42.0°C	69.6°C																																																																																										
15	T2	42.4°C	70.4°C																																																																																										
16	Q3	55.9°C	84.3°C																																																																																										
17	Q4	48.4°C	77.6°C																																																																																										
18	T1 Core	71.7°C	100.5°C																																																																																										
19	T1 Coil	55.0°C	82.9°C																																																																																										
20	Q101	51.0°C	77.5°C																																																																																										
21	Q104	45.5°C	72.4°C																																																																																										
22	L100	59.0°C	87.6°C																																																																																										
23	C105	37.8°C	65.4°C																																																																																										
24	C107	32.2°C	58.7°C																																																																																										
25	U201	32.6°C	60.4°C																																																																																										
26	J111	36.9°C	63.7°C																																																																																										
27	ZD103	45.7°C	74.3°C																																																																																										
28	ZD102	40.5°C	68.8°C																																																																																										
29	R105	49.0°C	77.1°C																																																																																										
30	D30	41.3°C	68.6°C																																																																																										
31	U110	34.8°C	61.8°C																																																																																										
32	U2	37.5°C	65.2°C																																																																																										
33	RTH3	60.1°C	89.0°C																																																																																										
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 119.3% LOAD Ta : 25°C	TEST : OK																																																																																									
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 %LOAD Ta= -45°C	TEST : OK																																																																																									
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C/95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50°C HUMIDITY= 95 %R.H	TEST : OK																																																																																									
5	TEMPERATURE COEFFICIENT	± 0.03%/°C(0~50°C)	I/P : 230 VAC O/P : FULL LOAD	±0.005%/°C(0~50°C)																																																																																									
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~+90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC																																																																																										
7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~+55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test																																																																																										



8	VIBRATION TEST	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 6G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 1609830.5HRS (2) 239302.7HRS (3) 302416.8HRS (4) 367842.5HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1524.0K hrs min. Telcordia SR-332 (Bellcore) ; 187.7K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Liutt		Wangdz

2020.10.01 TAG-QA-009