



# Test Report: ENC-360-24

---

360W Programmable Desktop Type Battery Charger

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST

ENVIRONMENT TEST


## ■ DESIGN VERIFY TEST

### OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	BOOST CHARGE VOLTAGE	28.8V±0.4V	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	28.81 V
2	FLOAT CHARGE VOLTAGE	27.6V±0.4V	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	27.61V
3	OUTPUT CURRENT	12A±1.2A	I/P: 230 VAC O/P:C.V MODE-2V Ta:25°C	11.55A
4	LEAKAGE CURRENT FROM BATTERY (TYP)	<1mA	I/P: AC OFF O/P:BAT. LOAD Ta:25°C	243 μA

### INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~264VAC	I/P:TESTING O/P:BAT. LOAD Ta:25°C	56V~ 264 V
			I/P: LOW-LINE-3V=87 V HIGH-LINE+15%= 300 V O/P:BAT. LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN ( AC POWER ON/OFF NO DAMAGE )	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	LEAKAGE CURRENT	< 3.5 mA / 240VAC	I/P: 240 VAC O/P:Min LOAD Ta:25°C	L-FG: 0.8 mA N-FG: 0.8 mA
4	INPUT CURRENT (TYP)	230 V/ 1.9 A 115 V/ 3.8 A	I/P: 230 VAC I/P: 115 VAC O/P:BAT. LOAD Ta:25°C	I = 1.51 A/ 230VAC I = 3.04 A/ 115VAC
5	POWER FACTOR (TYP)	0.95/ 230 VAC 0.98/ 115 VAC	I/P: 230 VAC I/P: 115 VAC O/P:BAT. LOAD Ta:25°C	PF= 0.98 / 230VAC PF= 0.997 / 115VAC
6	EFFICIENCY (TYP)	93%	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	94.52%
7	INRUSH CURRENT (TYP)	230 V/ 80 A COLD START	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	I = 36.5 A/230VAC T50= 1690 us/230V
INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH1: Input current (1V=1A)				

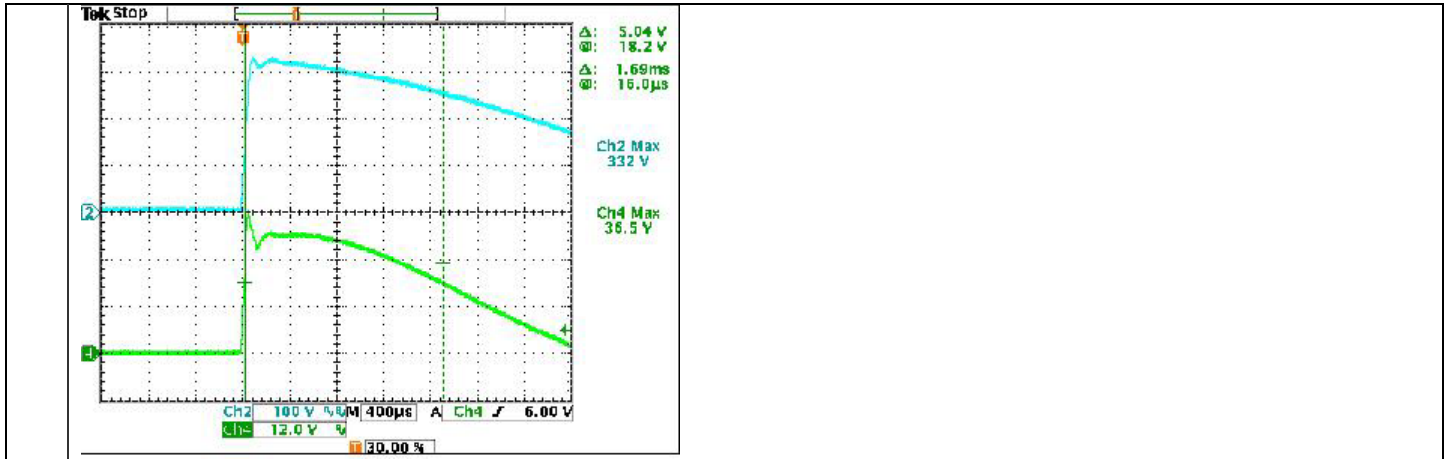


**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER VOLTAGE PROTECTION	CH1:31~36.5V PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover	I/P: 264 VAC I/P: 90 VAC O/P:TESTING Ta:25°C	32.06 V/264VAC 32.04V/ 90VAC PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover
2	OVER TEMPERATURE PROTECTION	SPEC: NO DAMAGE  PROTECTION TYPE : Shut down O/P voltage, recovers automatically after temperature goes down	I/P: 264 VAC I/P: 90 VAC O/P:BAT. LOAD	O.T.P.Active PROTECTION TYPE : Shut down O/P voltage, recovers automatically after temperature goes down
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE PROTECTION TYPE : Shut down O/P voltage, re-power on to recover	I/P: 264 VAC O/P: NO LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Shut down O/P voltage, re-power on to recover
4	BATTERY REVERSE POLARITY	By internal fuse.	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	Fuse open

**CONTROL FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT		
1	TEMPERATURE COMPENSATION	Constant voltage point(V)				
		Ta=0°C	Ta=25°C	Ta=50°C		
		29.6±0.4V	28.8±0.4V	27.9±0.4V		
2	Charging curve	I/P:230Vac O/P:TESTING Ta:25°C	I/P: 230 VAC O/P:NO . LOAD Ta:25°C	Constant voltage point(V)		
				Ta=0°C	Ta=25°C	Ta=50°C
				29.72v	28.82v	27.91v

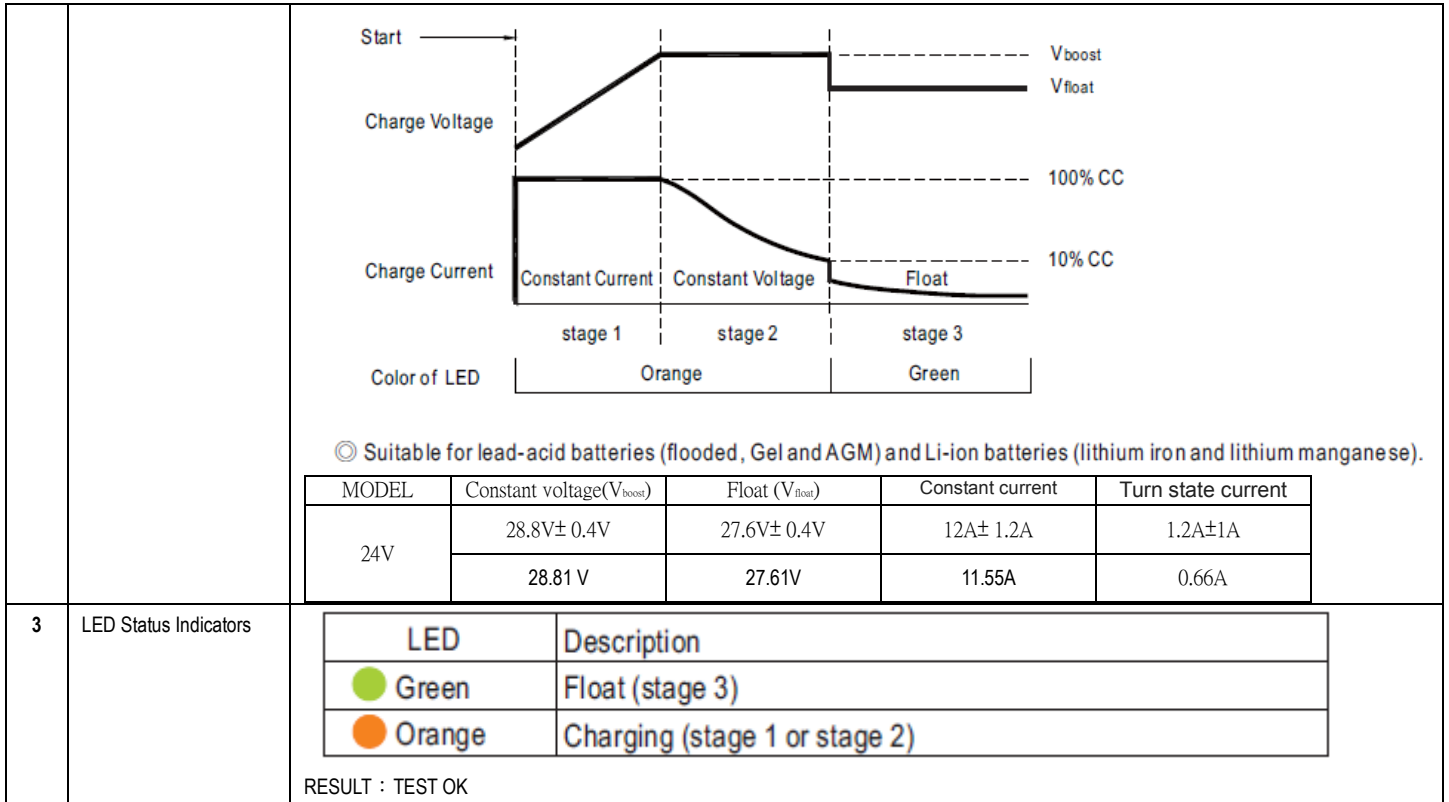

### COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	Power Transistor (D to S) or (C to E) <b>Peak Voltage</b>	Q 902 Rated 22A/600V VGS=±25	I/P:High-Line +3V = 267 V AC ON/OFF VDS : O/P: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue VGS: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue  I/P:High-Line +3V = 97 V AC ON/OFF VDS : O/P: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue VGS: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue  Ta:25°C	267V:  VDS : (1) 408V (2)10V (3)408V  VGS: (1)16.18V (2)0V (3)16.18V  97V:  VDS : (1)424V (2)10 V (3)416 V  VGS: (1)16.2V (2)0 V (3)16.1V
2	P.F.C Transistor (D to S) or (C to E) <b>Peak Voltage</b>	Q 1 Rated 26A/600V VGS=±25	I/P:High-Line +3V = 267 V AC ON/OFF VDS : O/P: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue	VDS : (1) 443V (2) 379V (3) 443V  VGS: (1) 17.8V (2) 0 V (3) 17.8V

			<p>VGS: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue</p> <p>I/P:High-Line +3V = 97 V AC ON/OFF VDS : O/P: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue</p> <p>VGS: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue Ta:25°C</p>	<p>VDS : (1)443V (2)138V (3)443V</p> <p>VGS: (1)18.2V (2) 0V (3) 18.0V</p>
3	P.F.C DIODE	D1 Rated 15A/ 600V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue Ta:25°C	(1) 419V (2) 0V (3) 415V
4	Diode Peak Voltage	Q 100 Rated: 80A/100V  Q101 Rated 80A/100V	I/P:High-Line +3V = 267 V AC ON/OFF O/P: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue (4) NO LOAD Ta:25°C	Q100: (1)66.7 V (2)0 V (3) 66.7V (4) 63.5 V  Q101: (1)66.7V (2) 0 V (3)66.7 V (4) 65.9 V
5	Input Capacitor Voltage	C 5 Rated 150 $\mu$ F/420V 105°C	I/P:High-Line +3V =267 V O/P: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue  Ta:25°C	(1) 426V (2) 402V (3) 414V
6	Control IC Voltage Test	PFC IC U1 Rated 20 V~ 0 V(MIN.)  PWM IC U901 Rated 20 V~ 0 V(MIN.)	I/P:High-Line +3V =267 V O/P: (1)CV=27.6V (2)OUTPUT SHORT (3)CV=27.6V continue Ta:25°C	U1: (1) 17V (2) 0V (3) 17.06V  U901: (1) 17.06V (2) 9.18V (3) 17.31V

## ■ SAFETY & E.M.C. TEST

### SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	EN 60950-1 I/P-O/P: 3 KVAC/min I/P-FG:2 KVAC/min O/P-FG:0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 0.6 KVAC/min Ta:25°C	I/P-O/P:8.4 mA I/P-FG: 5.72 mA O/P-FG:3.93mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M $\Omega$ I/P-FG: 500VDC>100M $\Omega$ O/P-FG:500VDC>100M $\Omega$	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P:9.81:G $\Omega$ I/P-FG:5.63G $\Omega$ O/P-FG: 26.5 $\Omega$ NO DAMAGE

3	GROUNDING CONTINUITY	EN 60950-1 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	25mΩ
---	----------------------	--	-----------------------	------

**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 LIGHT INDUSTRY L-N :1KV L,N-PE:2KV	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A

**RELIABILITY TEST**

**ENVIRONMENT TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : ENC-360-12 1. ROOM AMBIENT BURN-IN : HRS I/P : 230VAC O/P : FULL LOAD Ta= 31.8 °C 2. HIGH AMBIENT BURN-IN : HRS I/P : 230VAC O/P : FULL LOAD Ta= 52.6 °C		

		NO	Position	ROOM AMBIENT Ta=31.8°C	HIGH AMBIENT Ta= 52.6°C
		1	BD1	67.4°C	91.3°C
		2	C1	59.0°C	80.6°C
		3	LF1	61.5°C	84.5°C
		4	LF2	65.7°C	86.8°C
		5	C10	68.1°C	88.8°C
		6	C48	68.6°C	88.8°C
		7	RY1	82.8°C	91.7°C
		8	RT2	64.2°C	83.2°C
		9	PCB	63.9°C	81.9°C
		10	C58	63.9°C	80.0°C
		11	L1	69.3°C	89.8°C
		12	Q2	66.1°C	87.0°C
		13	D1	65.9°C	87.6°C
		14	C5	65.4°C	88.1°C
		15	Q901	65.1°C	87.0°C
		16	C90	70.1°C	91.2°C
		17	C42	68.6°C	89.4°C
		18	C44	65.4°C	87.7°C
		19	C43	70.1°C	90.9°C
		20	T1-1	92.7°C	98.5°C
		21	T1-2	96.5°C	103.5°C
		22	TSW1	65.0°C	87.2°C
		23	U1	63.9°C	84.8°C
		24	U901	64.2°C	87.1°C
		25	C202	69.5°C	89.2°C
		26	Q100	75.5°C	97.6°C
		27	C105	85.4°C	91.3°C
		28	FS10	93.8°C	104.3°C
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -30 °C	TEST : OK
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE		I/P : 272 VAC O/P : FULL LOAD Ta= 50°C HUMIDITY= 95 %R.H	TEST : OK
4	TEMPERATURE COEFFICIENT	± 0.05 %/°C(0-50°C)		I/P : 230 VAC O/P : FULL LOAD	± 0.03 %/°C(0-50°C)
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC			OK
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test			OK



7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
8	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 64480HRS (2) 32085HRS (3) 49040HRS (4) 135705HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 1178.7K hrs min. Telcordia SR-332 (Bellcore) ; 138.7K hrs min. MIL-HDBK-217F (25°C)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

12.10.30 A50-F031