



Test Report: ENC-360-48

360W Programmable Desktop Type Battery Charger

■ DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Control Function Test
Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test
E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST


■ **DESIGN VERIFY TEST**

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	BOOST CHARGE VOLTAGE	57.6V±0.8V	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	57.73V
2	FLOAT CHARGE VOLTAGE	55.2V±0.8V	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	55.32V
3	OUTPUT CURRENT	6A±0.6A	I/P: 230 VAC O/P:C.V MODE-2V Ta:25°C	5.9A
4	LEAKAGE CURRENT FROM BATTERY (TYP)	<1mA	I/P: AC OFF O/P:BAT. LOAD Ta:25°C	610 μA

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~264VAC	I/P:TESTING O/P:BAT. LOAD Ta:25°C	55 V~ 264 V
			I/P: LOW-LINE-3V=87 V HIGH-LINE+15%= 300 V O/P:BAT. LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	LEAKAGE CURRENT	< 3.5 mA / 240VAC	I/P: 240 VAC O/P:Min LOAD Ta:25°C	L-FG: 0.9 mA N-FG:0.9 mA
4	INPUT CURRENT (TYP)	230 V/ 1.9 A 115 V/ 3.8 A	I/P: 230 VAC I/P: 115 VAC O/P:BAT. LOAD Ta:25°C	I = 1.57 A/ 230VAC I = 3.16 A/ 115VAC
5	POWER FACTOR (TYP)	0.95/ 230 VAC 0.98/ 115 VAC	I/P: 230 VAC I/P: 115 VAC O/P:BAT. LOAD Ta:25°C	PF=0.983 / 230VAC PF= 0.998 / 115VAC
6	EFFICIENCY (TYP)	94%	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	94.24%
7	INRUSH CURRENT (TYP)	230 V/ 80 A COLD START	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	I = 36.5 A/230VAC T50= 1690 us/230V
INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH1: Input current (1V=1A)				

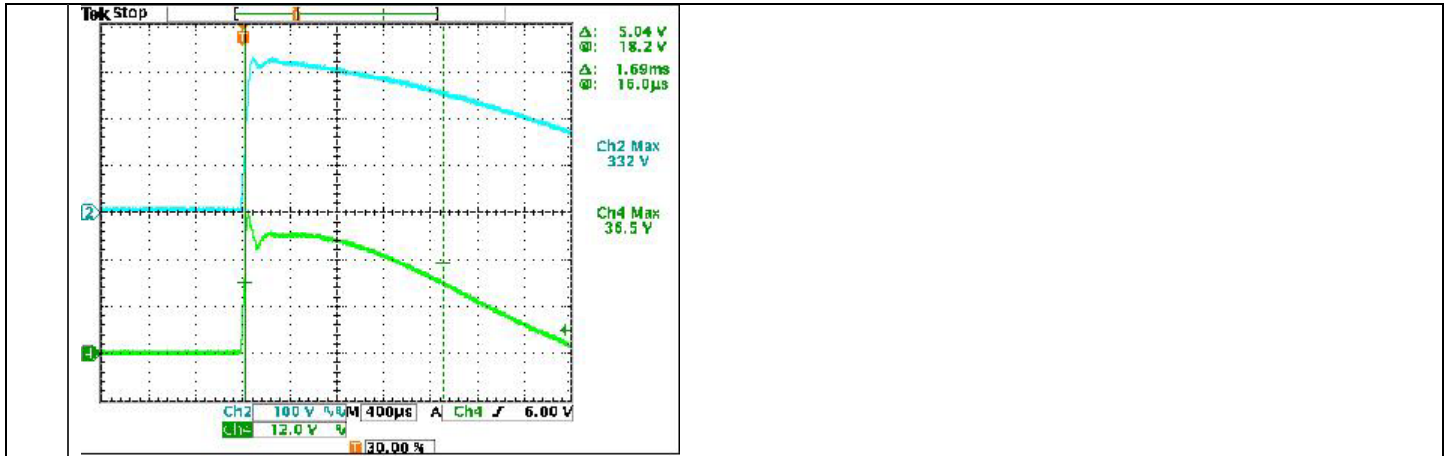

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER VOLTAGE PROTECTION	CH1:62.1~72.9V PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover	I/P: 264 VAC I/P: 90 VAC O/P:TESTING Ta:25°C	64.7V/264VAC 64.8V/ 90VAC PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover
2	OVER TEMPERATURE PROTECTION	SPEC: NO DAMAGE PROTECTION TYPE : Shut down O/P voltage, recovers automatically after temperature goes down	I/P: 264 VAC I/P: 90 VAC O/P:BAT. LOAD	O.T.P.Active PROTECTION TYPE : Shut down O/P voltage, recovers automatically after temperature goes down
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE PROTECTION TYPE : Shut down O/P voltage, re-power on to recover	I/P: 264 VAC O/P: NO LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Shut down O/P voltage, re-power on to recover
4	BATTERY REVERSE POLARITY	By internal fuse.	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	Fuse open

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT		
1	TEMPERATURE COMPENSATION	Constant voltage point(V)				
		Ta=0°C	Ta=25°C	Ta=50°C		
		59.3±0.8V	57.6±0.8V	55.8±0.8V		
2	Charging curve	I/P:230Vac O/P:TESTING Ta:25°C	I/P: 230 VAC O/P:NO . LOAD Ta:25°C	Constant voltage point(V)		
				Ta=0°C	Ta=25°C	Ta=50°C
				59.6v	57.8v	55.98v

	<p>Start →</p> <p>Charge Voltage: V_{boost}, V_{float}</p> <p>Charge Current: 100% CC, 10% CC</p> <p>Color of LED: Orange (stage 1), Green (stage 3)</p> <p>© Suitable for lead-acid batteries (flooded, Gel and AGM) and Li-ion batteries (lithium iron and lithium manganese).</p> <table border="1"> <thead> <tr> <th>MODEL</th> <th>Constant voltage(V_{boost})</th> <th>Float (V_{float})</th> <th>Constant current</th> <th>Turn state current</th> </tr> </thead> <tbody> <tr> <td rowspan="2">48V</td> <td>$57.6V \pm 0.8V$</td> <td>$55.2V \pm 0.8V$</td> <td>$6A \pm 0.6A$</td> <td>$0.6A \pm 0.5A$</td> </tr> <tr> <td>57.73V</td> <td>55.32V</td> <td>5.9A</td> <td>0.3A</td> </tr> </tbody> </table>	MODEL	Constant voltage(V_{boost})	Float (V_{float})	Constant current	Turn state current	48V	$57.6V \pm 0.8V$	$55.2V \pm 0.8V$	$6A \pm 0.6A$	$0.6A \pm 0.5A$	57.73V	55.32V	5.9A	0.3A
MODEL	Constant voltage(V_{boost})	Float (V_{float})	Constant current	Turn state current											
48V	$57.6V \pm 0.8V$	$55.2V \pm 0.8V$	$6A \pm 0.6A$	$0.6A \pm 0.5A$											
	57.73V	55.32V	5.9A	0.3A											
<p>3 LED Status Indicators</p>	<table border="1"> <thead> <tr> <th>LED</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td> Green</td> <td>Float (stage 3)</td> </tr> <tr> <td> Orange</td> <td>Charging (stage 1 or stage 2)</td> </tr> </tbody> </table> <p>RESULT : TEST OK</p>	LED	Description	Green	Float (stage 3)	Orange	Charging (stage 1 or stage 2)								
LED	Description														
Green	Float (stage 3)														
Orange	Charging (stage 1 or stage 2)														

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q 902 Rated 22A/600 V	I/P:High-Line +3V = 267 V AC ON/OFF VDS : O/P: (1)CV=55.2V (2)OUTPUT SHORT (3)CV=55.2V continue I/P:High-Line +3V = 97 V AC ON/OFF VDS : O/P: (1)CV=55.2V (2)OUTPUT SHORT (3)CV=55.2V continue Ta:25°C	VDS: (1) 425V (2) 421V (3) 417V VDS: (1) 534V (2) 542V (3) 441V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated 26 A/600V	I/P:High-Line +3V = 267 V AC ON/OFF VDS : O/P: (1)CV=55.2V (2)OUTPUT SHORT (3)CV=55.2V continue I/P:High-Line +3V = 97 V AC ON/OFF VDS : O/P: (1)CV=55.2V (2)OUTPUT SHORT (3)CV=55.2V continue Ta:25°C	VDS: (1) 505V (2) 461V (3) 453V VDS: (1) 546V (2) 493V (3) 509V

3	P.F.C DIODE	D1 Rated 600V 15A	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)CV=55.2V (2)OUTPUT SHORT (3)CV=55.2V continue Ta:25°C	D1: (1) 441V (2) 437V (3) 437V
4	Diode Peak Voltage	Q100 Rated 104 A/ 150V Q101 Rated 104 A/ 150V	I/P:High-Line +3V = 267 V AC ON/OFF O/P: (1)CV=55.2V (2)OUTPUT SHORT (3)CV=55.2V continue (4) NO LOAD Ta:25°C	Q100: VDS: (1) 133.7V (2) 35.6V (3) 132V (4) 125.6V Q101: VDS: (1) 131.2V (2) 28.3V (3) 129.6V (4) 128V
6	Input Capacitor Voltage	C 5 Rated 150 μ F/420V 105°C	I/P:High-Line +3V =267 V O/P: (1)CV=55.2V (2)OUTPUT SHORT (3)CV=55.2V continue Ta:25°C	(1) 411V (2) 419V (3) 411V
7	Control IC Voltage Test	PWM IC U1 Rated 20V~9.75V(MIN.) PWM IC U901 Rated 20V~10V(MIN.)	I/P:High-Line +3V =267 V O/P: (1)CV=55.2V (2)OUTPUT SHORT (3)CV=55.2V continue Ta:25°C	(1) 17.9V (2) 14.5V (3) 17.5V (1) 17.9V (2) 16.5V (3) 17.9V

■ SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	EN 60950-1 I/P-O/P: 3 KVAC/min I/P-FG:2 KVAC/min O/P-FG:0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 0.6 KVAC/min Ta:25°C	I/P-O/P:8.4 mA I/P-FG: 5.72 mA O/P-FG:3.93mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω I/P-FG: 500VDC>100M Ω O/P-FG:500VDC>100M Ω	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 11.6G Ω I/P-FG: 4.6G Ω O/P-FG:26.9G Ω NO DAMAGE
3	GROUNDING CONTINUITY	EN 60950-1 FG(PE) TO CHASSIS OR TRACE < 100 m Ω	40A / 2min Ta:25°C	25m Ω

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab

3	RADIATION	EN55022 CLASS B	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 LIGHT INDUSTRY L-N :1KV L,N-PE:2KV	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : ENC-360-12 1. ROOM AMBIENT BURN-IN : HRS I/P : 230VAC O/P : FULL LOAD Ta= 31.8 °C 2. HIGH AMBIENT BURN-IN : HRS I/P : 230VAC O/P : FULL LOAD Ta= 52.6 °C		

		NO	Position	ROOM AMBIENT Ta=31.8°C	HIGH AMBIENT Ta= 52.6°C
		1	BD1	67.4°C	91.3°C
		2	C1	59.0°C	80.6°C
		3	LF1	61.5°C	84.5°C
		4	LF2	65.7°C	86.8°C
		5	C10	68.1°C	88.8°C
		6	C48	68.6°C	88.8°C
		7	RY1	82.8°C	91.7°C
		8	RT2	64.2°C	83.2°C
		9	PCB	63.9°C	81.9°C
		10	C58	63.9°C	80.0°C
		11	L1	69.3°C	89.8°C
		12	Q2	66.1°C	87.0°C
		13	D1	65.9°C	87.6°C
		14	C5	65.4°C	88.1°C
		15	Q901	65.1°C	87.0°C
		16	C90	70.1°C	91.2°C
		17	C42	68.6°C	89.4°C
		18	C44	65.4°C	87.7°C
		19	C43	70.1°C	90.9°C
		20	T1-1	92.7°C	98.5°C
		21	T1-2	96.5°C	103.5°C
		22	TSW1	65.0°C	87.2°C
		23	U1	63.9°C	84.8°C
		24	U901	64.2°C	87.1°C
		25	C202	69.5°C	89.2°C
		26	Q100	75.5°C	97.6°C
		27	C105	85.4°C	91.3°C
		28	FS10	93.8°C	104.3°C
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -30 °C	TEST : OK
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE		I/P : 272 VAC O/P : FULL LOAD Ta= 50°C HUMIDITY= 95 %R.H	TEST : OK
4	TEMPERATURE COEFFICIENT	± 0.05 %/°C(0-50°C)		I/P : 230 VAC O/P : FULL LOAD	± 0.03 %/°C(0-50°C)
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC			OK
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test			OK



7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
8	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 64480HRS (2) 32085HRS (3) 49040HRS (4) 135705HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 1178.7K hrs min. Telcordia SR-332 (Bellcore) ; 138.7K hrs min. MIL-HDBK-217F (25°C)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

12.10.30 A50-F031