



Test Report: HLG-320H-C1050

320W Single Output LED Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CURRENT TOLERANCE	±5%	I/P: 230 VAC I/P:115VAC O/P:FULL LOAD Ta:25°C	1.0489A /230VAC@CV MAX-1V 1.0491A /230VAC@CV MIN 1.0486A/115VAC@CV MAX-1V 1.0492A/115VAC@CV MIN 0.06%
2	CONSTANT CURRENT REGION	CH1: 152 V~ 305V	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	152V~ 305 V /230VAC
3	OPEN CIRCUIT VOLTAGE (max.)	311V	I/P: 230 VAC O/P:NO LOAD Ta:25°C	306V
4	CURRENT ADJ. RANGE	CH1: 525mA~ 1050mA	I/P: 230 VAC I/P:115VAC O/P:CV MIN & CV MAX-1V Ta:25°C	0.427A~1.186 A /230VAC@CV MAX-1V 0.429A~1.186A /230VAC@CV MIN 0.429A~1.186 A/115VAC@CV MAX-1V 0.43A~ 1.186A/115VAC@CV MIN
5	CURRENT RIPPLE	5.0% max. @rated current	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	1.5%
6	SET UP TIME (Max)	230VAC/ 500 ms (Max) 115VAC/1000ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 242ms 115 VAC/280 ms

INPUT=230VAC/50HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage


050-X-3014A, M152161491, Tue Mar 22 16:23:34 2016

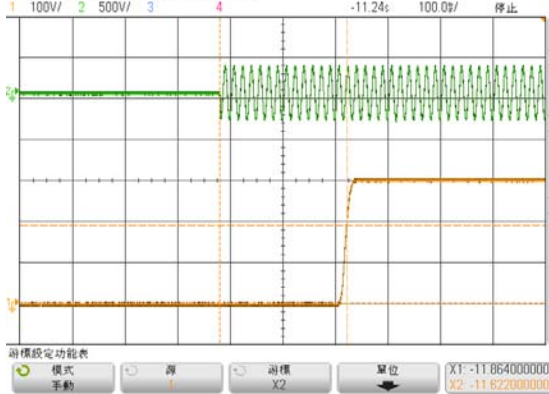

INPUT=115VAC/60HZ @ FULL LOAD



CH1 : Output Voltage CH2 : AC Input Voltage

050-X-3014A, M152161491, Tue Mar 22 16:26:51 2016


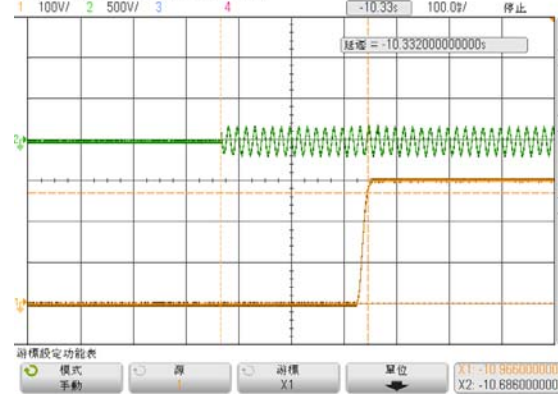


7	DIMMING OPERATION (for B-Type)	<p>※3 in 1 dimming function (for B-Type)</p> <p>* Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.</p> <p>*Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.</p> <p>*Dimming source current from power supply: 100µ A (typ.)</p>		
---	--------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--	--



◎ Applying additive 0 ~ 10VDC

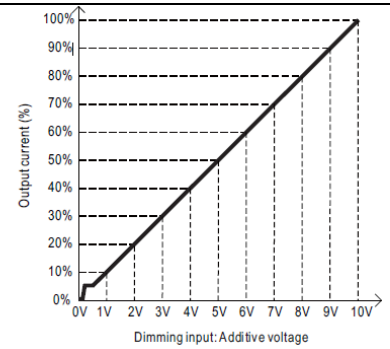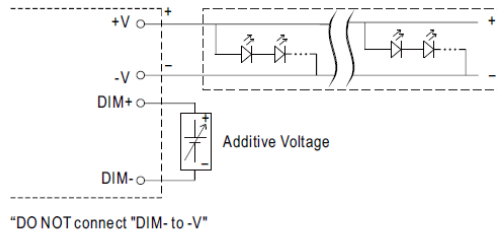

◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

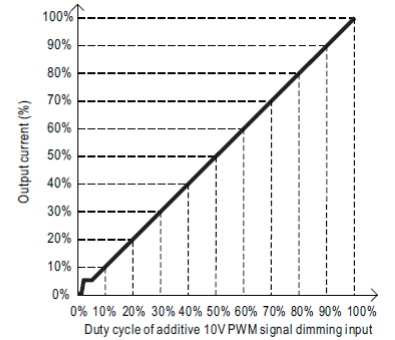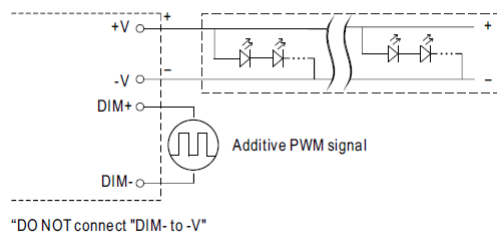

◎ Applying additive resistance:

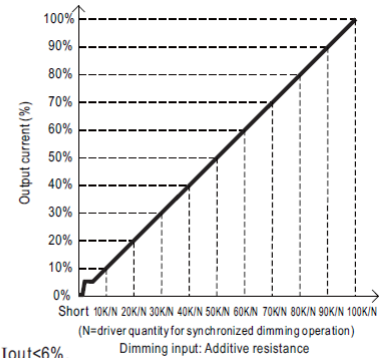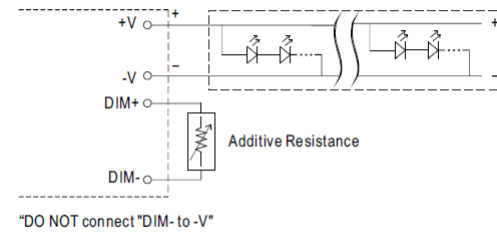

Note : 1. Min. dimming level is about 6% and the output current is not defined when $0 < I_{out} < 6\%$.
 2. The output current could drop down to 0% when dimming input is about $0k\Omega$ or 0Vdc, or 10V PWM signal with 0% duty cycle.

I/P : 230VAC
 O/P : DIMMING TEST
 TA : 25°C




R	SHORT	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
O/P CURRENT	0.00000A	0.110A	0.213A	0.316A	0.421A	0.522A	0.625A	0.730A	0.830A	0.940A	1.040A	1.060A
%	0.00%	10.48%	20.29%	30.10%	40.10%	49.71%	59.52%	69.52%	79.05%	89.52%	99.05%	100.95%
V	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
O/P CURRENT	0.00000A	0.117A	0.222A	0.319A	0.426A	0.536A	0.627A	0.740A	0.840A	0.950A	1.050A	1.060A
%	0.00%	11.14%	21.14%	30.38%	40.57%	51.05%	59.71%	70.48%	80.00%	90.48%	100.00%	100.95%
PWM (100HZ)	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
O/P CURRENT	0.00000A	0.111A	0.214A	0.318A	0.421A	0.523A	0.625A	0.730A	0.830A	0.940A	1.040A	1.060A
%	0.00%	10.57%	20.38%	30.29%	40.10%	49.81%	59.52%	69.52%	79.05%	89.52%	99.05%	100.95%

TEST RESULT : OK

8 DIMMING OPERATION (primary side; for DA-Type)

※ DALI Interface


- * Apply DALI signal between DA+ and DA-.
- * DALI protocol comprises 16 groups and 64 addresses.
- * First step is fixed at 8% of output. Please contact MEAN WELL for other setup.

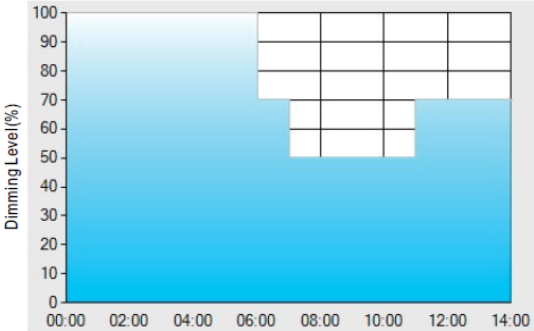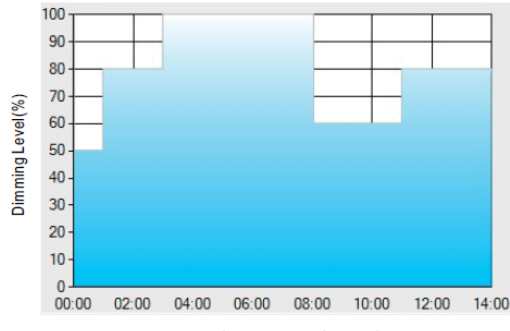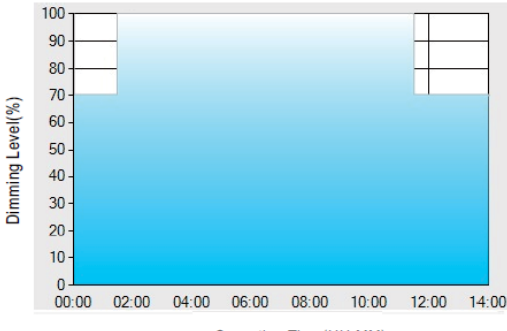		I/P : 230VAC O/P : DIMMING TEST TA : 25°C TEST RESULT : OK																																													
9	DIMMING OPERATION (for Dxx-Type by User definition)	<p> ※Smart timer dimming function (for Dxx-Type by User definition) MEAN WELL Smart timer dimming primarily provides the adaptive proportion dimming profile for the output constant current level to perform up to 14 consecutive hours. 3 dimming profiles hereunder are defined accounting for the most frequently seen applications. If other options may be needed, please contact MEAN WELL for details. Ex : Ⓒ D01-Type: the profile recommended for residential lighting </p> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">  <p style="text-align: center;">Operating Time(HH:MM)</p> </div> <div style="width: 45%;"> <p>Set up for D01-Type in Smart timer dimming software program:</p> <table border="1" data-bbox="1050 611 1484 741"> <thead> <tr> <th></th> <th>T1</th> <th>T2</th> <th>T3</th> <th>T4</th> </tr> </thead> <tbody> <tr> <td>TIME**</td> <td>06:00</td> <td>07:00</td> <td>11:00</td> <td>---</td> </tr> <tr> <td>LEVEL**</td> <td>100%</td> <td>70%</td> <td>50%</td> <td>70%</td> </tr> </tbody> </table> </div> </div> <p> Ex : Ⓒ D02-Type: the profile recommended for street lighting </p> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">  <p style="text-align: center;">Operating Time(HH:MM)</p> </div> <div style="width: 45%;"> <p>Set up for D02-Type in Smart timer dimming software program:</p> <table border="1" data-bbox="997 1010 1497 1135"> <thead> <tr> <th></th> <th>T1</th> <th>T2</th> <th>T3</th> <th>T4</th> <th>T5</th> </tr> </thead> <tbody> <tr> <td>TIME**</td> <td>01:00</td> <td>03:00</td> <td>8:00</td> <td>11:00</td> <td>---</td> </tr> <tr> <td>LEVEL**</td> <td>50%</td> <td>80%</td> <td>100%</td> <td>60%</td> <td>80%</td> </tr> </tbody> </table> </div> </div> <p> Ex : Ⓒ D03-Type: the profile recommended for tunnel lighting </p> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">  <p style="text-align: center;">Operating Time(HH:MM)</p> </div> <div style="width: 45%;"> <p>Set up for D03-Type in Smart timer dimming software program:</p> <table border="1" data-bbox="1066 1406 1417 1541"> <thead> <tr> <th></th> <th>T1</th> <th>T2</th> <th>T3</th> </tr> </thead> <tbody> <tr> <td>TIME**</td> <td>01:30</td> <td>11:00</td> <td>---</td> </tr> <tr> <td>LEVEL**</td> <td>70%</td> <td>100%</td> <td>70%</td> </tr> </tbody> </table> </div> </div> <p> I/P : 230VAC O/P : DIMMING TEST TA : 25°C TEST RESULT : OK </p>		T1	T2	T3	T4	TIME**	06:00	07:00	11:00	---	LEVEL**	100%	70%	50%	70%		T1	T2	T3	T4	T5	TIME**	01:00	03:00	8:00	11:00	---	LEVEL**	50%	80%	100%	60%	80%		T1	T2	T3	TIME**	01:30	11:00	---	LEVEL**	70%	100%	70%
	T1	T2	T3	T4																																											
TIME**	06:00	07:00	11:00	---																																											
LEVEL**	100%	70%	50%	70%																																											
	T1	T2	T3	T4	T5																																										
TIME**	01:00	03:00	8:00	11:00	---																																										
LEVEL**	50%	80%	100%	60%	80%																																										
	T1	T2	T3																																												
TIME**	01:30	11:00	---																																												
LEVEL**	70%	100%	70%																																												

INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	50V~305 V
			I/P: LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1).TEST:OK (2).TEST :OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 110VAC ~305VAC O/P:FULL~MIN LOAD Ta:25°C	OK
3	INPUT CURRENT (TYP)	277VAC/ 1.45 A 230 VAC/ 1.65 A 115 VAC/ 3.5 A	I/P: 277VAC/230 VAC/115 VAC O/P:FULL LOAD Ta:25°C	I= 1.244A/277VAC I= 1.485A/ 230VAC I= 3.05A/ 115VAC
4	POWER FACTOR(TYP)	0.95/230 VAC FULL LOAD 0.98/115 VAC FULL LOAD 0.92/277 VAC FULL LOAD	I/P: 230 VAC/115VAC/277VAC O/P:FULL LOAD Ta:25°C	PF= 0.988/230V/100%LOAD PF= 0.998/115V/100%LOAD PF= 0.973/277V/100%LOAD

P.F vs LOAD

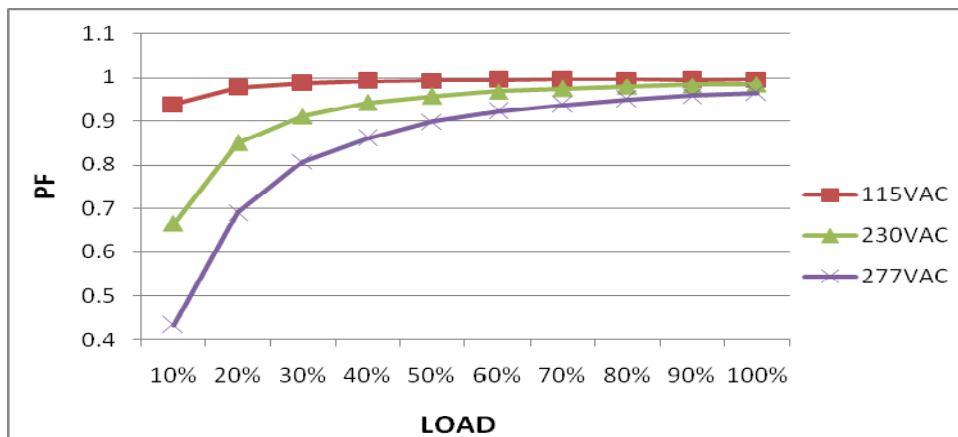

5	EFFICIENCY (TYP)	94 %	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	94.7 %
---	------------------	------	------------------------------------------	--------

EFFICIENCY vs LOAD

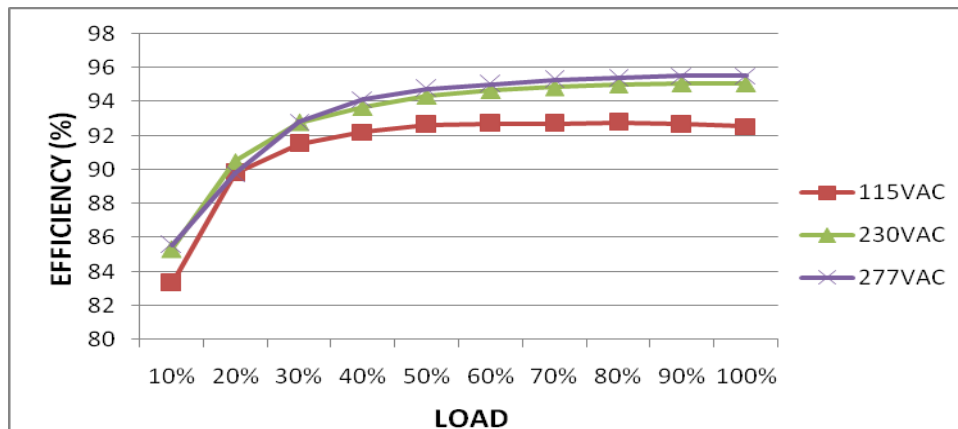

6	INRUSH CURRENT (TYP)	230 V/ 70 A COLD START (twidth=1200us measured at 50% Ipeak) COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I _r = 40.25A/ 230VAC T50= 1200 us																																												
	<p>INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A)</p>																																															
7	TOTAL HARMONIC DISTORTION	THD < 20% @ ≥ 50% load/115VAC/230VAC, THD < 20% @ ≥ 70% load/277VAC	I/P : 230VAC O/P : 100% LOAD 50% LOAD Ta : 25°C	THD : 6.81 % THD : 11.16 %																																												
			I/P : 277VAC O/P : 100% LOAD 70% LOAD Ta : 25°C	THD : 8.88 % THD : 17.96 %																																												
<p>THD vs LOAD</p> <table border="1"> <caption>THD vs LOAD Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>115VAC THD (%)</th> <th>230VAC THD (%)</th> <th>277VAC THD (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>11.16</td><td>32.0</td><td>50.0</td></tr> <tr><td>20%</td><td>6.81</td><td>13.0</td><td>35.0</td></tr> <tr><td>30%</td><td>6.81</td><td>10.0</td><td>20.0</td></tr> <tr><td>40%</td><td>6.81</td><td>8.0</td><td>15.0</td></tr> <tr><td>50%</td><td>6.81</td><td>7.0</td><td>12.0</td></tr> <tr><td>60%</td><td>6.81</td><td>6.81</td><td>10.0</td></tr> <tr><td>70%</td><td>6.81</td><td>6.81</td><td>8.88</td></tr> <tr><td>80%</td><td>6.81</td><td>6.81</td><td>8.88</td></tr> <tr><td>90%</td><td>6.81</td><td>6.81</td><td>8.88</td></tr> <tr><td>100%</td><td>6.81</td><td>6.81</td><td>8.88</td></tr> </tbody> </table>					LOAD (%)	115VAC THD (%)	230VAC THD (%)	277VAC THD (%)	10%	11.16	32.0	50.0	20%	6.81	13.0	35.0	30%	6.81	10.0	20.0	40%	6.81	8.0	15.0	50%	6.81	7.0	12.0	60%	6.81	6.81	10.0	70%	6.81	6.81	8.88	80%	6.81	6.81	8.88	90%	6.81	6.81	8.88	100%	6.81	6.81	8.88
LOAD (%)	115VAC THD (%)	230VAC THD (%)	277VAC THD (%)																																													
10%	11.16	32.0	50.0																																													
20%	6.81	13.0	35.0																																													
30%	6.81	10.0	20.0																																													
40%	6.81	8.0	15.0																																													
50%	6.81	7.0	12.0																																													
60%	6.81	6.81	10.0																																													
70%	6.81	6.81	8.88																																													
80%	6.81	6.81	8.88																																													
90%	6.81	6.81	8.88																																													
100%	6.81	6.81	8.88																																													

ROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER VOLTAGE PROTECTION	V1: 320 V~ 352 V	I/P: 305VAC I/P: 230VAC I/P: 90VAC O/P: MIN LOAD Ta: 25°C	334.96V/ 305VAC 335.16V/ 230VAC 334.9V/ 90VAC PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover

2	OVER TEMPERATURE PROTECTION	PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover	I/P: 305 VAC I/P: 90 VAC O/P: FULL LOAD	O.T.P.Active PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 90 VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q5 Rated 20 A/ 600 V	I/P:High-Line +3V =308v AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Full Load continue Ta:25°C	VDS: (1)521V/5.12A (2)546V/3A (3)468V/2.56A
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 20A/ 600V	I/P:High-Line +3V =308v AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Full Load continue Ta:25°C	VDS: (1)562V/13A (2)546V/10.35A (3)537V/13.35A
3	P.F.C DIODE	D2 Rated 15A/600V	I/P:High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Full Load continue Ta:25°C	(1)481V (2)450V (3)446V
4	Diode Peak Voltage	D102 Rated 3A/400V D103 Rated 3A/400V	I/P:High-Line +3V =308 V D102 : AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Full Load continue D103 : AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Full Load continue Ta:25°C	VDS: (1)315V (2)1.87V (3)310V VDS: (1)320V (2)0.312V (3)315V
5	Input Capacitor Voltage	C5 Rated: 220 μ/ 450V 105 °C Surge Voltage 495V	I/P:High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change	(1)475V (2)443V (3)446V

			(4)Full load continue Ta:25°C	(4) 440V
6	Control IC Voltage Test	PWM IC U900 Rated 16 V	U900: I/P:High-Line +3V =308 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. Ta:25°C	U900 (1) 12.1V (2) 12.8V (3) 12.8V (4) 12V

SAFETY & EMC TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	IEC60950-1 I/P-O/P: 3.75KVAC/min I/P-FG: 2 KVAC/min<4.5mA O/P-FG:1.5KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P: 4.52 mA I/P-FG: 4.08mA O/P-FG: 3.8mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 28.3GΩ I/P-FG: 28G Ω O/P-FG: 30G Ω NO DAMAGE
3	GROUNDING CONTINUITY	IEC60950-1 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	26 mΩ
4	LEAKAGE CURRENT	IEC60950-1 < 0.75mA / 277VAC	I/P: 277 VAC O/P:Min LOAD Ta:25°C	L-FG: 0.4 mA N-FG:0.4 mA L,N -V(+):0.24 mA L,N-V(-):0.24 mA

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A CLASS C	I/P: 230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA B
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA B

6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA B
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results, please refer to the latest EMC test report.			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																												
1	TEMPERATURE RISE TEST	MODEL : HLG-320H-C1050 1. ROOM AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta=29.4°C 2. HIGH AMBIENT BURN-IN : 14 HRS I/P : 230VAC O/P : FULL LOAD Ta=50.3 °C																																																																																														
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 29.4 °C</th> <th>HIGH AMBIENT Ta=50.3°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>L2</td><td>57.9°C</td><td>78.8°C</td></tr> <tr><td>2</td><td>C11</td><td>58.1°C</td><td>79.0°C</td></tr> <tr><td>3</td><td>L1</td><td>56.6°C</td><td>77.5°C</td></tr> <tr><td>4</td><td>BD1</td><td>60.5°C</td><td>81.4°C</td></tr> <tr><td>5</td><td>Q1</td><td>60.5°C</td><td>81.4°C</td></tr> <tr><td>6</td><td>RY1</td><td>58.8°C</td><td>79.7°C</td></tr> <tr><td>7</td><td>C5</td><td>56.9°C</td><td>77.8°C</td></tr> <tr><td>8</td><td>C81</td><td>58.5°C</td><td>79.4°C</td></tr> <tr><td>9</td><td>U1</td><td>56.5°C</td><td>77.4°C</td></tr> <tr><td>10</td><td>U900</td><td>56.6°C</td><td>77.5°C</td></tr> <tr><td>11</td><td>C902</td><td>59.2°C</td><td>80.1°C</td></tr> <tr><td>12</td><td>RTH2</td><td>56.9°C</td><td>77.8°C</td></tr> <tr><td>13</td><td>C906</td><td>55.8°C</td><td>76.7°C</td></tr> <tr><td>14</td><td>T1</td><td>70.8°C</td><td>91.7°C</td></tr> <tr><td>15</td><td>C202</td><td>56.1°C</td><td>77.0°C</td></tr> <tr><td>16</td><td>C201</td><td>54.7°C</td><td>75.6°C</td></tr> <tr><td>17</td><td>D102</td><td>61.3°C</td><td>82.2°C</td></tr> <tr><td>18</td><td>D103</td><td>59.2°C</td><td>80.1°C</td></tr> <tr><td>19</td><td>C103</td><td>55.4°C</td><td>76.3°C</td></tr> <tr><td>20</td><td>C108</td><td>53.2°C</td><td>74.1°C</td></tr> <tr><td>21</td><td>C110</td><td>51.8°C</td><td>72.7°C</td></tr> <tr><td>22</td><td>Q5</td><td>59.8°C</td><td>80.7°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 29.4 °C	HIGH AMBIENT Ta=50.3°C	1	L2	57.9°C	78.8°C	2	C11	58.1°C	79.0°C	3	L1	56.6°C	77.5°C	4	BD1	60.5°C	81.4°C	5	Q1	60.5°C	81.4°C	6	RY1	58.8°C	79.7°C	7	C5	56.9°C	77.8°C	8	C81	58.5°C	79.4°C	9	U1	56.5°C	77.4°C	10	U900	56.6°C	77.5°C	11	C902	59.2°C	80.1°C	12	RTH2	56.9°C	77.8°C	13	C906	55.8°C	76.7°C	14	T1	70.8°C	91.7°C	15	C202	56.1°C	77.0°C	16	C201	54.7°C	75.6°C	17	D102	61.3°C	82.2°C	18	D103	59.2°C	80.1°C	19	C103	55.4°C	76.3°C	20	C108	53.2°C	74.1°C	21	C110	51.8°C	72.7°C	22	Q5	59.8°C	80.7°C
NO	Position	ROOM AMBIENT Ta= 29.4 °C	HIGH AMBIENT Ta=50.3°C																																																																																													
1	L2	57.9°C	78.8°C																																																																																													
2	C11	58.1°C	79.0°C																																																																																													
3	L1	56.6°C	77.5°C																																																																																													
4	BD1	60.5°C	81.4°C																																																																																													
5	Q1	60.5°C	81.4°C																																																																																													
6	RY1	58.8°C	79.7°C																																																																																													
7	C5	56.9°C	77.8°C																																																																																													
8	C81	58.5°C	79.4°C																																																																																													
9	U1	56.5°C	77.4°C																																																																																													
10	U900	56.6°C	77.5°C																																																																																													
11	C902	59.2°C	80.1°C																																																																																													
12	RTH2	56.9°C	77.8°C																																																																																													
13	C906	55.8°C	76.7°C																																																																																													
14	T1	70.8°C	91.7°C																																																																																													
15	C202	56.1°C	77.0°C																																																																																													
16	C201	54.7°C	75.6°C																																																																																													
17	D102	61.3°C	82.2°C																																																																																													
18	D103	59.2°C	80.1°C																																																																																													
19	C103	55.4°C	76.3°C																																																																																													
20	C108	53.2°C	74.1°C																																																																																													
21	C110	51.8°C	72.7°C																																																																																													
22	Q5	59.8°C	80.7°C																																																																																													
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/110VAC O/P : 100 % LOAD Ta= -45°C	TEST : OK																																																																																												
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60°C NO DAMAGE	I/P : 315 VAC O/P : FULL LOAD Ta= 60°C HUMIDITY= 95 %R.H	TEST : OK																																																																																												
4	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.001%/°C (0~50°C)																																																																																												

5	STORAGE TEMPERATURE TEST	<ol style="list-style-type: none"> 1. Thermal shock Temperature : -50°C~ +125°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC 	OK
6	THERMAL SHOCK TEST	<ol style="list-style-type: none"> 1. Thermal shock Temperature : -45°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test 	OK
7	VIBRATION TEST	<ol style="list-style-type: none"> 1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25°C 	TEST : OK
8	CAPACITOR LIFE CYCLE	<p>SUPPOSE C103 IS THE MOST CRITICAL COMPONENT</p> <ol style="list-style-type: none"> (1) I/P : 230VAC O/P : FULL LOAD Tc= 75 °C LIFE TIME (2) I/P : 230VAC O/P : 75% LOAD Tc= 75 °C LIFE TIME (3) I/P : 230VAC O/P : 50% LOAD Tc= 75 °C LIFE TIME 	<ol style="list-style-type: none"> (1) 79984 HRS (2) 99469 HRS (3) 101072 HRS
9	MTBF	<p>Conducted by Parts Stress Analysis Prediction 168.2K hrs min. MIL-HDBK-217F (25°C)</p>	
10	Ongoing Reliability Test	<p>I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 62,000 hours</p>	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT ZENG

12.10.30 A50-F031