



Test Report: LRS-100N2-36

100W Single Output High Peak Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 32.4V~ 39.6V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	30.7V~40.8V/230VAC 36.7V~40.8V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1.0%~+1.0 %	I/P: 90VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.06%~ +0.08%
3	LINE REGULATION	V1: -0.5%~ +0.5%	I/P: 90VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0.00%~ +0.00%
4	LOAD REGULATION	V1: -0.5%~ +0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.00 %~ +0.03 %
5	OVER/UNDERSHOOT TEST	<± 5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	0.3%
6	RIPPLE & NOISE (Max)	V1: 200mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 151mVp-p

high frequency :

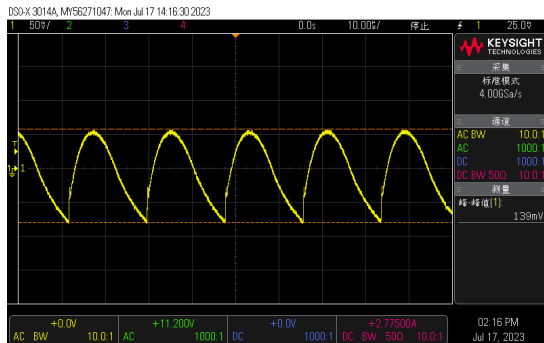

low frequency :

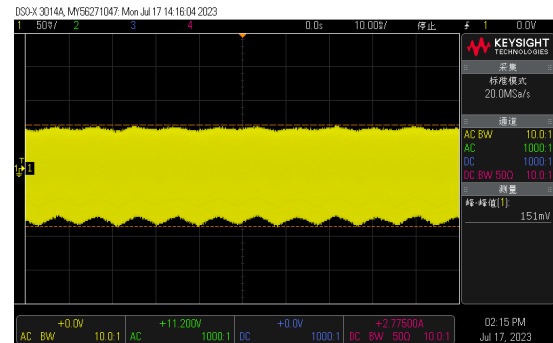

<p>7</p> <p>SET UP TIME(Max)</p>	<p>230VAC/500ms 115VAC/500ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/132ms 115VAC/154ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>	
<p>8</p> <p>RISE TIME (Max)</p>	<p>230VAC/30ms 115VAC/30ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/11.0ms 115VAC/12.4ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p>		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p>	
<p>9</p> <p>HOLD UP TIME (Typ.)</p>	<p>230VAC/55ms 115VAC/10ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/97ms 115VAC/ 19ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>	

10	DYNAMIC LOAD	V1: 3600mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	350mVp-p 342mVp-p
<p>FULL /50% LOAD 50%DUTY / 120HZ</p>		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p>		


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC 120VDC~ 373VDC	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL / 50% LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL / 50% LOAD Ta:25°C	(1) 85V~264V (2) 120Vdc~373Vdc/FULL LOAD 120Vdc~373Vdc/50% LOAD (3) 120Vdc~373Vdc/FULL LOAD 120Vdc~373Vdc/50% LOAD
			I/P: LOW-LINE-3V=87 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:90 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 1.2A 115V/ 2.1A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =1.02A/ 230VAC I =1.73A/ 115VAC
4	LEAKAGE CURRENT	< 0.75mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.298mA N-FG : 0.3060mA



5	NO CONSUMPTION	LOAD < 0.5W	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	< 0.31 W/115VAC < 0.38W/230VAC
6	EFFICIENCY(Typ.)	90%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	90.03%


EFFICIENCY vs LOAD

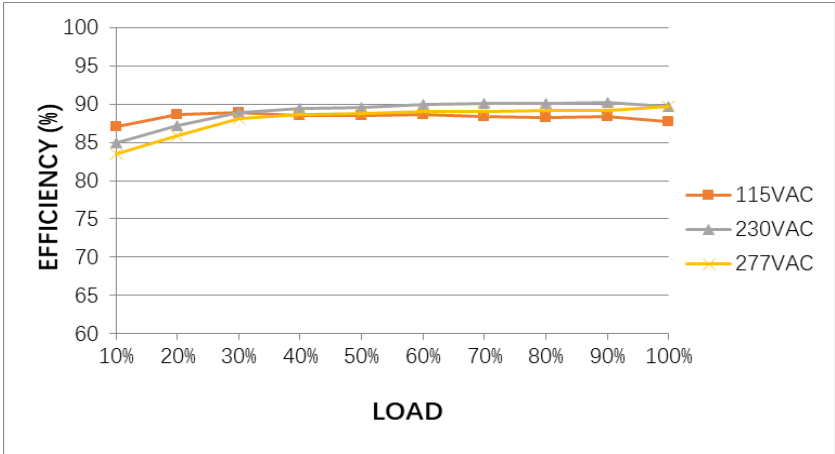


7	INRUSH CURRENT(Typ.)	230V/55A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I =54.8A/ 230VAC T50= 912 us/230V
---	----------------------	------------------------	---	--------------------------------------

INPUT=230VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH1 : Input current

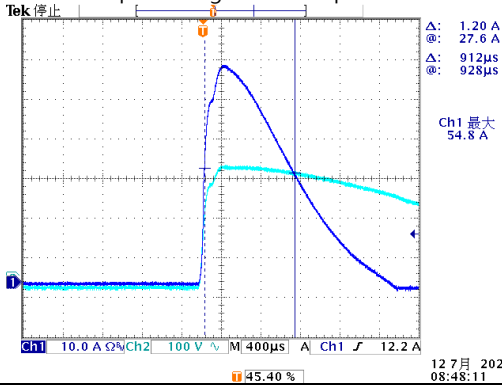

FUNCTION TEST

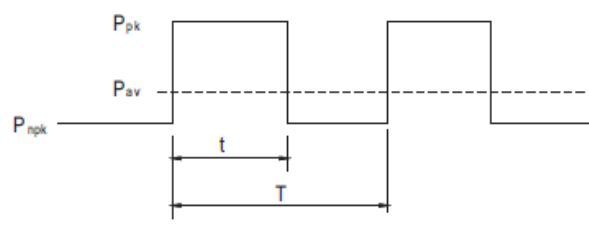NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PEAK POWER	I/P: 230 VAC O/P: PEAK LOAD (1Hour NO DAMGE) Ta:25°C Test Result : PASS Function Manual 1. Peak Power $P_{av} = \frac{P_{pk} \times t + P_{ngk} \times (T-t)}{T} \leq P_{rated}$ $Duty = \frac{t}{T} \times 100\% \leq 35\%$ $t \leq 5 \text{ sec}$ 		P _{av} : Average output power (W) P _{pk} : Peak output power (W) P _{ngk} : Non-peak output power(W) P _{rated} : Rated output power(W) t : Peak power width(sec) T : Period(sec)

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105 %~ 200%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	131.79%/ 264VAC 131.79%/ 230VAC 132.5%/100VAC PROTECTION TYPE : Output power >105% rated for more than 5 seconds then shut down o/p voltage, re-power on to recover 228.2%/ 264VAC 237.5%/ 230VAC 229.3%/100VAC Ouput power >200% rated, hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	41.4V~48.6V	I/P: 264VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	45.4V/ 264VAC 45.4V/ 230VAC 45.6V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 24A/650V	AC ON/OFF I/P:High-Line +3V =300V VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8)PEAK LOAD I/P:Low-Line -3V = 97V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8)PEAK LOAD Ta:25°C	VDS: (1) 623V (2) 595V (3) 623V (4) 627V (5) 635V (6) 631V (7) 619V (8) 631V VDS: (1) 322V (2) 290V (3) 343V (4) 318V (5) 322V (6) 343V (7) 339V (8) 322V
2	Diode Peak Voltage	D101 Rated 20A/300V	AC ON/OFF I/P:High-Line +3V =300 V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	D101: VDS: (1) 251V (2) 199V (3) 249V (4) 253V (5) 255V (6) 247V (7) 245V (8) 243V

3	Input Voltage	Capacitor C5 Rated: 180μ /400V Surge voltage: 450V	I/P:High-Line +3V =300V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25°C	(1)431V (2)423V (3)423V (4)415V
4	Control IC Voltage Test	PWM IC U1 Rated 9.5 V~ 28.0 V O/P IC U102 Rated -0.3V~ 40V	AC ON/OFF I/P:High-Line +3V =300V O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VRmin(Low LINE) Ta:25°C	(1) 14.4V (2) 12.2V (3) 14.4V (4) 14.2V (5) 13.4V U102 (1) 23.3V (2) 0.03V (3) 23.3V (4) 23.3V (5) 23.7V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5KVAC/min Ta:25°C	I/P-O/P:2.48mA I/P-FG:1.86mA O/P-FG:1.63mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: >9999MΩ I/P-FG: >9999MΩ O/P-FG: >9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	11mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P: ≤80% LOAD Ta:25°C	PASS
2	CONDUCTION	Compliance to EAC TP TC 020	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	Compliance to EAC TP TC 020	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																								
1	TEMPERATURE RISE TEST	MODEL : LRS-100N2-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=29.1 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=51.9 °C																																																										
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=29.1 °C</th> <th>HIGH AMBIENT Ta=51.9 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>RTH1</td><td>88.9°C</td><td>100.3°C</td></tr> <tr><td>2</td><td>BD1</td><td>62.8°C</td><td>87.1°C</td></tr> <tr><td>3</td><td>C5</td><td>50.7°C</td><td>76.0°C</td></tr> <tr><td>4</td><td>D5</td><td>80.8°C</td><td>106.7°C</td></tr> <tr><td>5</td><td>R7</td><td>83.3°C</td><td>107.8°C</td></tr> <tr><td>6</td><td>R15</td><td>69.5°C</td><td>95.4°C</td></tr> <tr><td>7</td><td>Q1</td><td>64.2°C</td><td>89.8°C</td></tr> <tr><td>8</td><td>C35</td><td>59.6°C</td><td>85.2°C</td></tr> <tr><td>9</td><td>U1</td><td>58.2°C</td><td>84.1°C</td></tr> <tr><td>10</td><td>T1</td><td>80.9°C</td><td>106.1°C</td></tr> <tr><td>11</td><td>D101</td><td>80.1°C</td><td>103.9°C</td></tr> <tr><td>12</td><td>C105</td><td>65.3°C</td><td>89.8°C</td></tr> <tr><td>13</td><td>R100</td><td>68.8°C</td><td>92.7°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=29.1 °C	HIGH AMBIENT Ta=51.9 °C	1	RTH1	88.9°C	100.3°C	2	BD1	62.8°C	87.1°C	3	C5	50.7°C	76.0°C	4	D5	80.8°C	106.7°C	5	R7	83.3°C	107.8°C	6	R15	69.5°C	95.4°C	7	Q1	64.2°C	89.8°C	8	C35	59.6°C	85.2°C	9	U1	58.2°C	84.1°C	10	T1	80.9°C	106.1°C	11	D101	80.1°C	103.9°C	12	C105	65.3°C	89.8°C	13	R100	68.8°C	92.7°C
NO	Position	ROOM AMBIENT Ta=29.1 °C	HIGH AMBIENT Ta=51.9 °C																																																									
1	RTH1	88.9°C	100.3°C																																																									
2	BD1	62.8°C	87.1°C																																																									
3	C5	50.7°C	76.0°C																																																									
4	D5	80.8°C	106.7°C																																																									
5	R7	83.3°C	107.8°C																																																									
6	R15	69.5°C	95.4°C																																																									
7	Q1	64.2°C	89.8°C																																																									
8	C35	59.6°C	85.2°C																																																									
9	U1	58.2°C	84.1°C																																																									
10	T1	80.9°C	106.1°C																																																									
11	D101	80.1°C	103.9°C																																																									
12	C105	65.3°C	89.8°C																																																									
13	R100	68.8°C	92.7°C																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 131 * LOAD Ta : 25°C	TEST : OK																																																								
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/115VAC O/P : 100 * LOAD Ta=-35/-25 °C	TEST : OK																																																								
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C/95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK																																																								
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C(0~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.009 %/°C(0~50°C)																																																								
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC																																																									

7	THERMAL SHOCK TEST	-30~50°C	1. Thermal shock Temperature : -35°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 6G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C 105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta=25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta=50 °C LIFE TIME	(1) 160446HRS (2) 25210HRS (3) 64456HRS (4) 129058HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 2802.6K hrs min. Telcordia SR-332 (Bellcore) ; 536.6K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/HUANGMK	WENF	LINKX

2020.10.1 TAG-QA-009