



Test Report: NSP-1000-60

1000W AC/DC High Reliable Multi-Industrial Enclosed Type Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

■ DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 54 V~ 72V	I/P : 230 VAC O/P : MIN LOAD Ta : 25°C	50.1V~73.5V/230VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1%~ 1%	I/P: 85VAC /305VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.07 % ~ + 0.12 %
3	LINE REGULATION	V1: -0.5%~ 0.5%	I/P: 85VAC~ 305VAC O/P:FULL LOAD Ta:25°C	V1: -0.02 % ~ +0.02 %
4	LOAD REGULATION	V1: -0.5%~ 0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.02 %~ +0.00 %
5	OVER/UNDERSHOOT TEST	< ± 5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	2.3 %
6	RIPPLE & NOISE (Max)	V1: 450 mVp-p	I/P: 230 VAC O/P: MIN LOAD—FULL LOAD Ta:25°C	V1: 175 mVp-p / 100% load

high frequency :

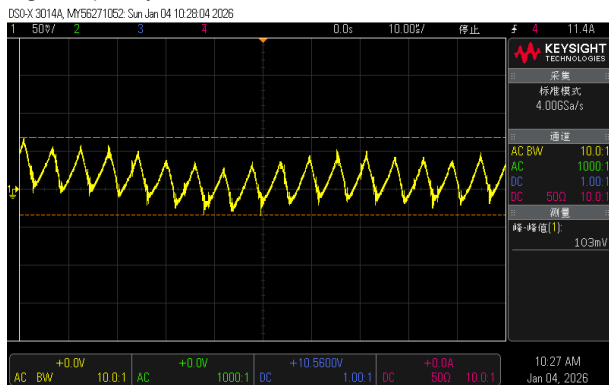


low frequency :

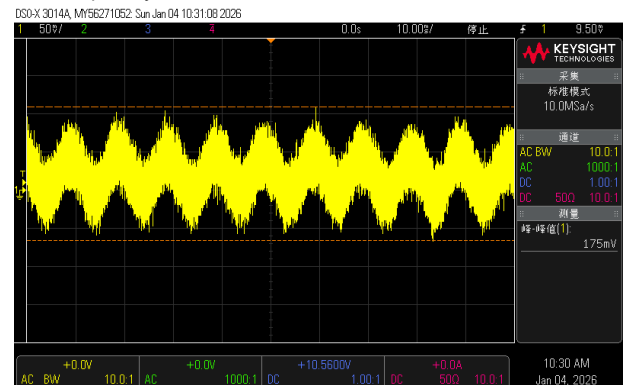


7	SET UP TIME(Max)	277VAC/1500ms 230VAC/1500ms 115VAC/2500ms	I/P : 277VAC I/P : 230VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	277VAC/ 607 ms 230VAC/ 734 ms 115VAC/ 1310 ms
---	------------------	---	--	---


INPUT=277VAC/60HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

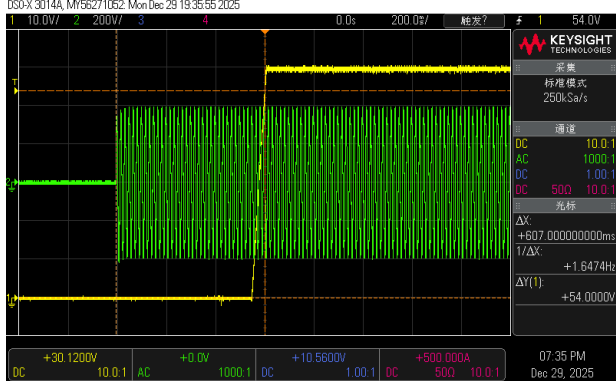

INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

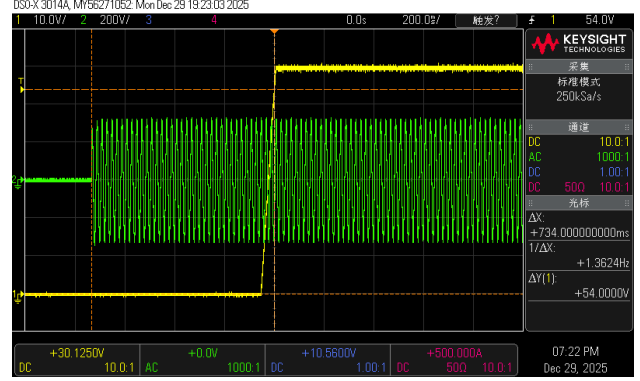


INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

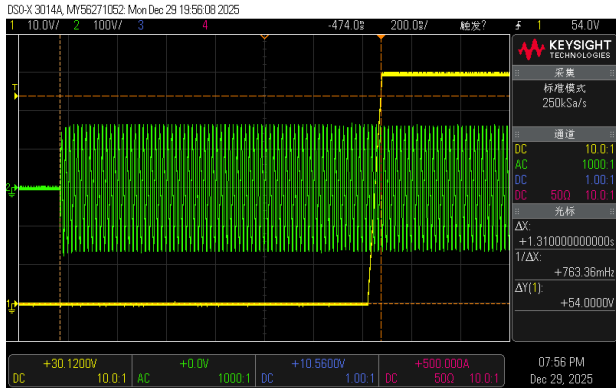



8	RISE TIME (Max)	277VAC/80ms	I/P : 277VAC	277VAC/ 48 ms
		230VAC/80ms	I/P : 230VAC	230VAC/ 48 ms
		115VAC/80ms	I/P : 115VAC	115VAC/ 48 ms
			O/P : FULL LOAD	
			Ta : 25°C	

INPUT=277VAC/60HZ @ FULL LOAD
CH1 : Output Voltage




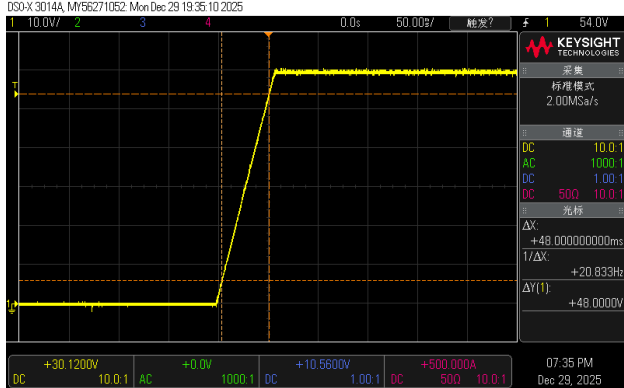


INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage

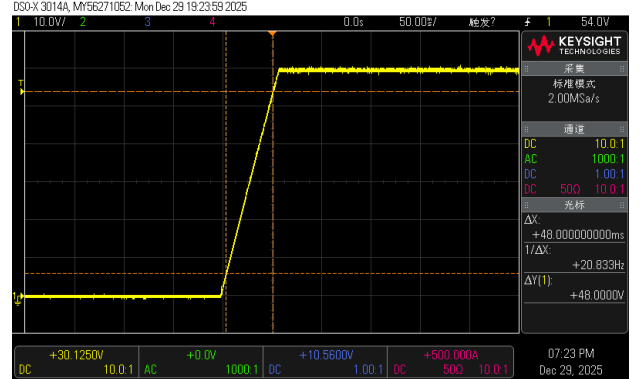

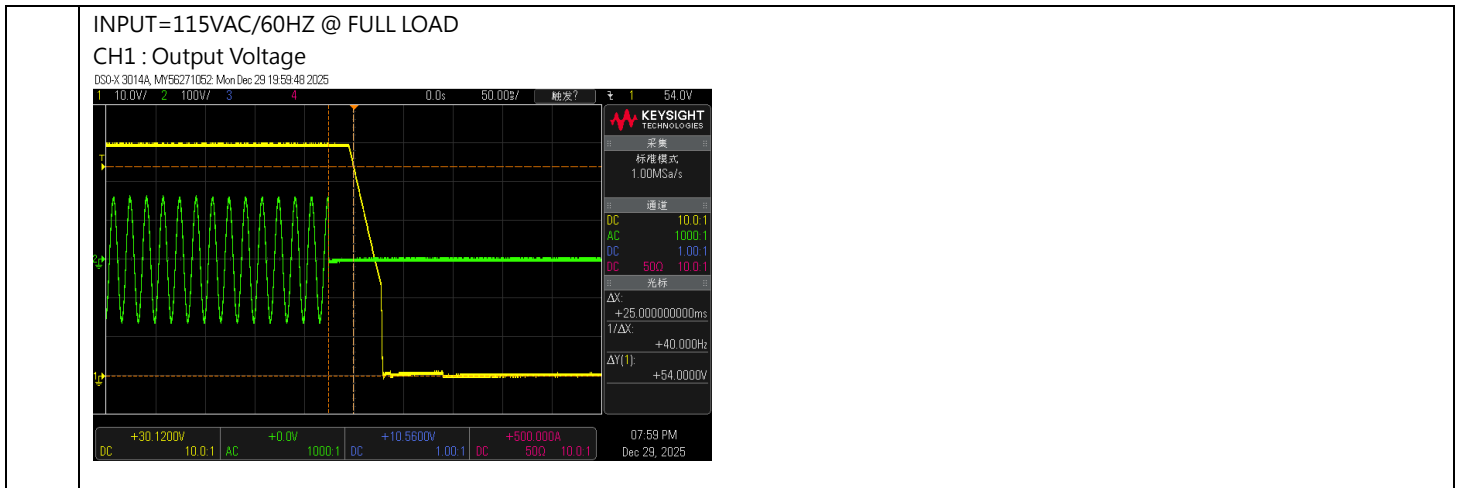

9	HOLD UP TIME (Typ.) 12ms@70%load 8ms@full load	I/P : 277 VAC I/P : 230VAC I/P : 115 VAC O/P : 70%LOAD/FULL LOAD Ta : 25°C	277VAC: 38ms/ 25 ms 230VAC: 38ms/ 26 ms 115VAC: 38ms/ 25 ms
---	--	--	---

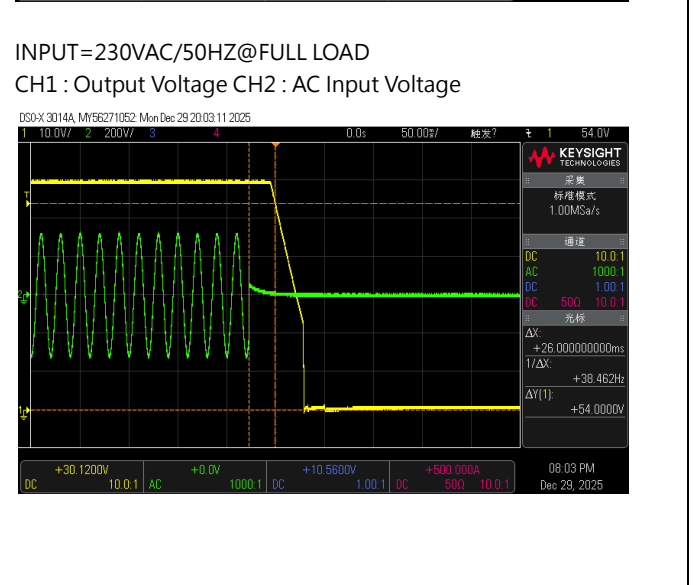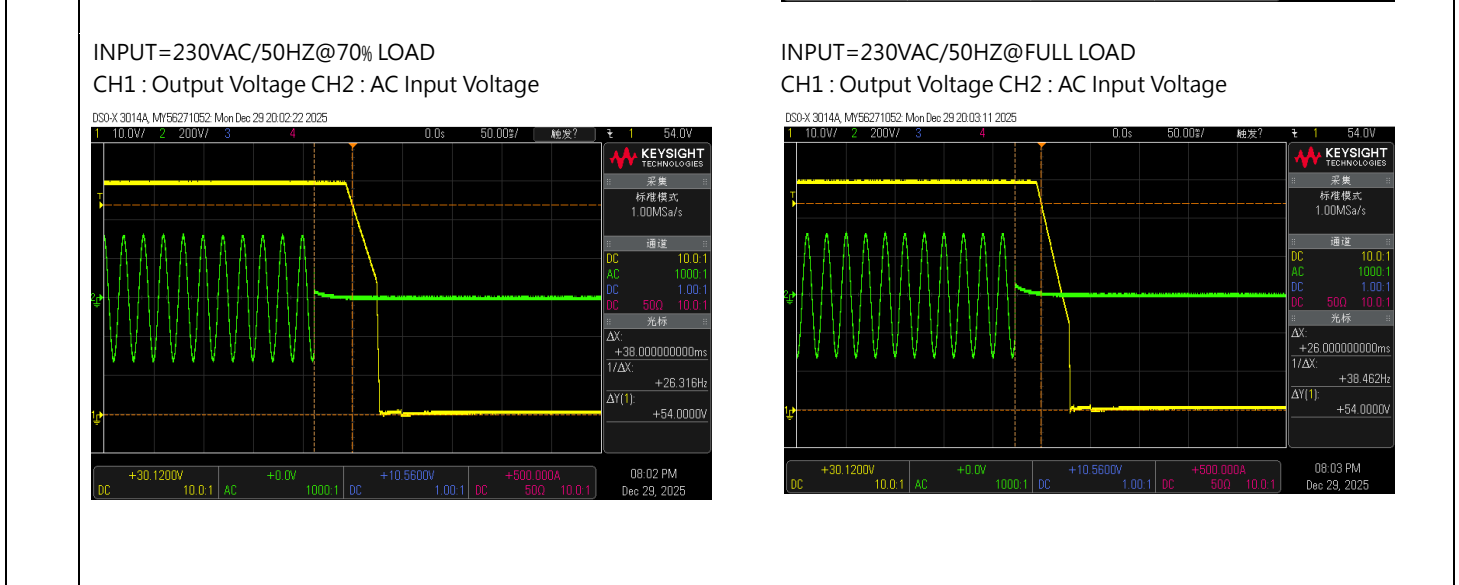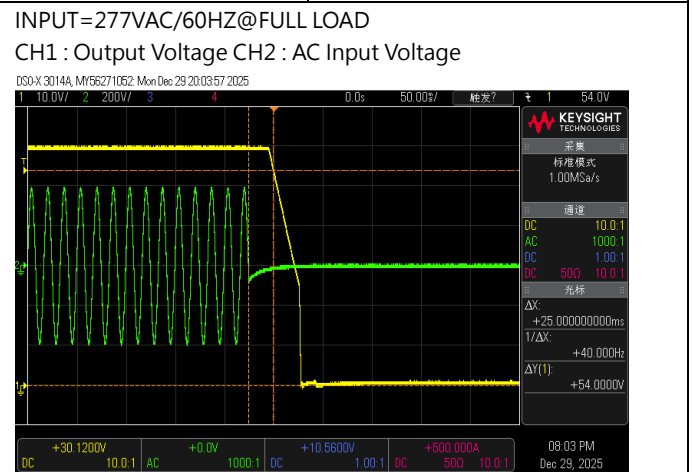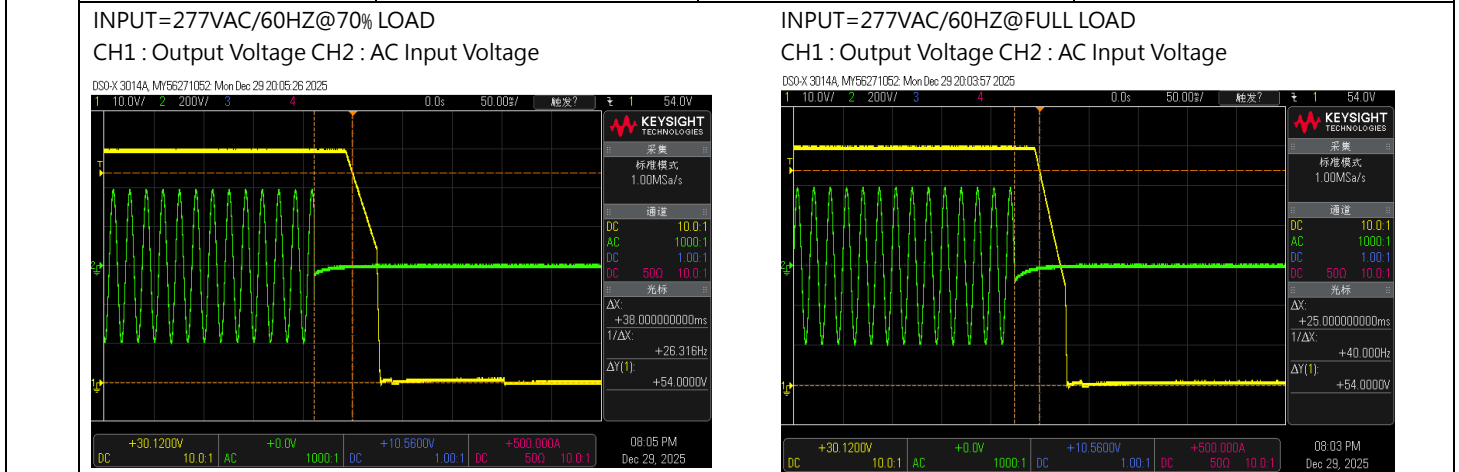


	<p>INPUT=115VAC/60HZ@70% LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>		<p>INPUT=115VAC/60HZ@FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>	
10	DYNAMIC LOAD	V1: 12000 mVp-p	<p>I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C</p>	<p>580mVp-p 470mVp-p</p>
<p>FULL /50% LOAD 50%DUTY / 120HZ</p>		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p>		

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~305VAC 120VDC~ 431VDC	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL / 50% LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL / 50% LOAD Ta:25°C	(1) 85 V ~ 305V (2) 120 Vdc~431Vdc/FULL LOAD 120Vdc~ 431Vdc/50% LOAD (3) 120Vdc~431Vdc/FULL LOAD 120 Vdc~ 431Vdc/50% LOAD
			I/P: LOW-LINE-3V=82V HIGH-LINE+10V=315 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:85VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	277V/ 5A 230V/ 6A 115V/ 12A	I/P : 277VAC I/P : 230VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	I =3.96 A/ 277VAC I =4.71 A/ 230VAC I =9.59 A/ 115VAC
4	LEAKAGE CURRENT	Earth leakage current < 350μA(rms)@277VAC	I/P : 277 VAC O/P : Min LOAD Ta : 25°C	L-FG : 221.2 μA N-FG : 222.3 μA
		Touch current <100μA (rms)@277 VAC		L-V+ : 88.0 μA L-V- : 88.4 μA N-V+ : 77.0 μA N-V- : 88.2 μA
5	POWER FACTOR (Typ.)	0.92/277VAC 0.95/ 230VAC 0.98/ 115VAC	I/P : 277VAC I/P : 230VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	PF=0.965 /277VAC PF=0.984 /230VAC PF=0.994 /115VAC

P.F vs LOAD


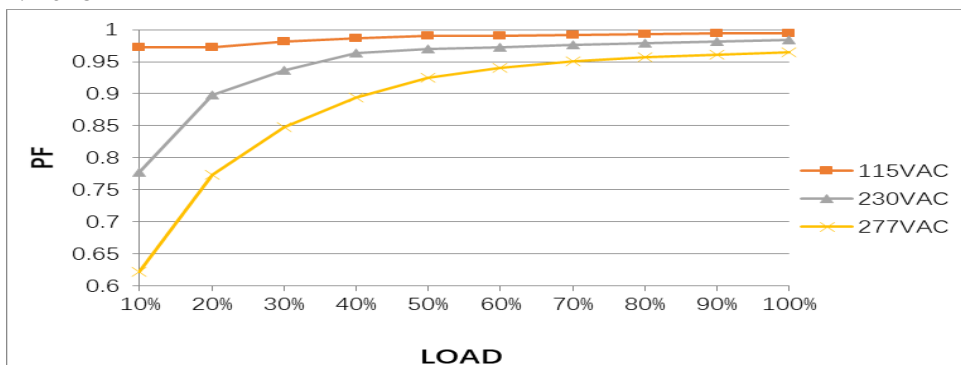








6	EFFICIENCY(Typ.)	94 %	I/P:230 VAC O/P:FULL LOAD Ta:25°C	94.7 %
<p>EFFICIENCY vs LOAD</p>				
7	INRUSH CURRENT(Typ.)	50A/277VAC 40A/230VAC 25A/115VAC COLD START	I/P : 277VAC I/P : 230VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	I =36.0A/ 277VAC T50= 2540us/277V I =27.8A/230VAC T50= 2320 us/230V I =13.5A/ 115VAC T50= 810 us/115V
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>INPUT=277VAC/50HZ @ FULL LOAD</p> <p>CH2 : AC Input Voltage CH4 : Input current</p> <p>DSO-X 3014A, MY56271052, Sun, Jan 04 13:04:27 2026</p> </div> <div style="width: 48%;"> <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH2 : AC Input Voltage CH4 : Input current</p> <p>DSO-X 3014A, MY56271052, Sun, Jan 04 11:55:40 2026</p> </div> </div> <div style="margin-top: 20px;"> <p>INPUT=115VAC/50HZ @ FULL LOAD</p> <p>CH2 : AC Input Voltage CH4 : Input current</p> <p>DSO-X 3014A, MY56271052, Sun, Jan 04 13:31:17 2026</p> </div>				











PROTECTION FUNCTION TEST





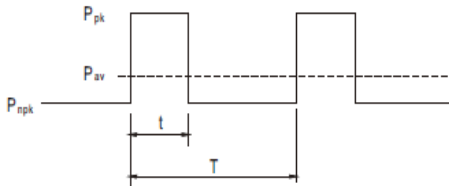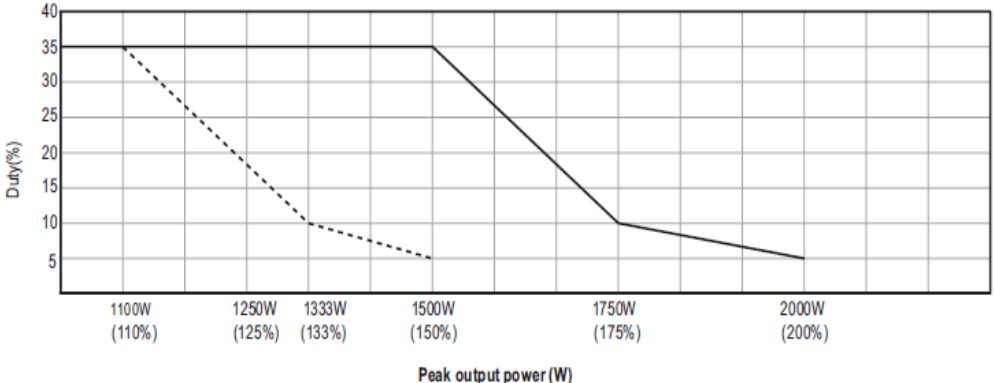

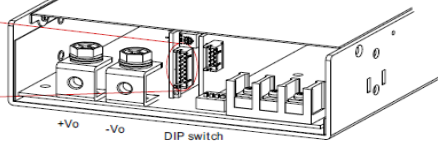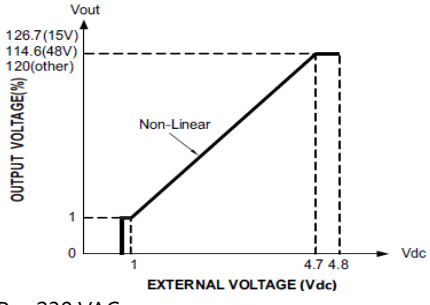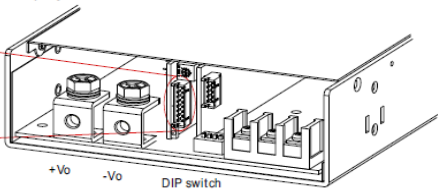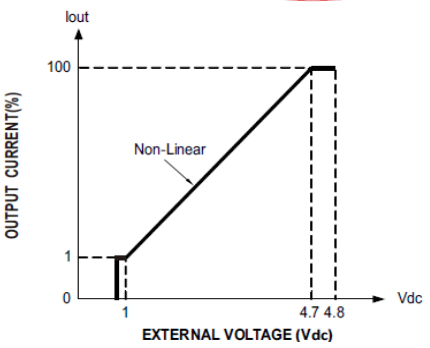

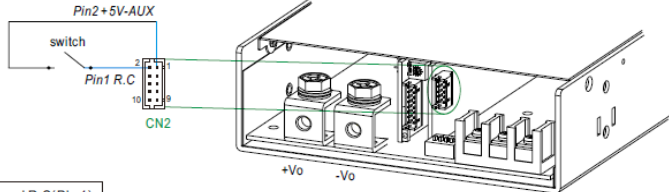







































NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105 % ~ 200 %	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P:TESTING Ta:25°C	107.74%/ 305VAC 107.74%/ 230VAC 107.74%/ 85VAC Protection type : Peak Load Mode: From 105% to 200% of rated output power, unit will shut down after 5 seconds of continuous operation. AC repower on to recover. At >200% of rated output power, constant current limiting is activated. Unit will shut down after 5 seconds of continuous operation. AC repower on to recover. Current Limiting Mode: Constant current limiting, recovers automatically after abnormal condition is removed.
2	OVER VOLTAGE PROTECTION	73 V~86 V	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P:MIN LOAD Ta:25°C	80.8 V/ 305VAC 81.9 V/ 230VAC 81.9 V/ 85VAC Protection type : Shut down and latch off output voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 305VAC I/P: 85VAC O/P:FULL LOAD	O.T.P. Active Protection type : Shut down output voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Protection type : Peak Load Mode: Constant current limiting, unit will shut down after 5 Sec, AC repower on to recover. Current Limiting Mode: Constant current limiting, recovers automatically after abnormal condition is removed.

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PEAK POWER	<p>■ Function Manual</p> <p>1. Peak Power</p> $P_{av} = \frac{P_{pk} \times t + P_{rpk} \times (T-t)}{T} \leq P_{rated}$ $Duty = \frac{t}{T} \times 100\% \leq 35\%$ $t \leq 5 \text{ sec}$  <p> P_{pk}: Peak output power (W) P_{rpk}: Non-peak output power (W) P_{rated}: Rated output power (W) t: Peak power width(sec) T: Period(sec) </p>  <p> For example (24V model) $V_{in}=220Vac, Duty_max=5\%$ $P_{av}=P_{rated}=1000W$ $P_{pk}=2000W$ $t \leq 5sec$ $T \geq \frac{5sec}{5\%} = 100sec$ $P_{rpk} \leq \frac{TP_{av} - tP_{pk}}{T-t} = 947.4W$ </p> <p>Note: When the output voltage is adjusted to the upper limit, the peak power is 150% of rated power</p>		<p>I/P: 100/200 VAC O/P: PEAK LOAD Ta: 25°C TEST RESULT : PASS</p>

<p>2</p> <p>OUTPUT VOLTAGE PROGRAMMABLE(PV)</p>	<p>2. Output Voltage Programming(P.V)</p> <p>(1)Default by potentiometer (SVR) (a)Set DIP switch position-3 to OFF(refer to the illustration on the right). (b)Output voltage can be trimmed by SVR.</p> <p>(2)By Output Voltage Programming (a)Set DIP switch position-3 to ON(refer to the illustration on the right). (b)The output voltage can be trimmed to 0~120% by applying EXTERNAL VOLTAGE between PV and GND on CN1.</p>    <p>I/P: 230 VAC O/P:FULL LOAD Ta:25°C TEST RESULT : PASS</p> <table border="1" data-bbox="502 974 1540 1153"> <thead> <tr> <th>External voltage(DC)</th> <th><0.4V</th> <th>1V</th> <th>2.524V</th> <th>4.7V</th> <th>4.8V</th> </tr> </thead> <tbody> <tr> <td>SPEC(%)</td> <td>0%</td> <td>0%~6%</td> <td>50%±5%</td> <td>120%±5%</td> <td>120%±5%</td> </tr> <tr> <td>Vout(%)</td> <td>0%</td> <td>0.516V(0.86%)</td> <td>30.08V(50.13%)</td> <td>70.39V(117.32%)</td> <td>72.34V(120.57%)</td> </tr> </tbody> </table>	External voltage(DC)	<0.4V	1V	2.524V	4.7V	4.8V	SPEC(%)	0%	0%~6%	50%±5%	120%±5%	120%±5%	Vout(%)	0%	0.516V(0.86%)	30.08V(50.13%)	70.39V(117.32%)	72.34V(120.57%)
External voltage(DC)	<0.4V	1V	2.524V	4.7V	4.8V														
SPEC(%)	0%	0%~6%	50%±5%	120%±5%	120%±5%														
Vout(%)	0%	0.516V(0.86%)	30.08V(50.13%)	70.39V(117.32%)	72.34V(120.57%)														
<p>3</p> <p>OUTPUT CURRENT PROGRAMMABLE (PC)</p>	<p>3. Output Current Programming(P.C)</p> <p>(1)Default Overload Protection(OLP) value (a)Set DIP switch position-2 to OFF(refer to the illustration on the right). (b)Output current is set default value.</p> <p>(2)By Constant Current Level Programming (a)Set DIP switch position-2 to ON(refer to the illustration on the right). (b)The constant current level can be trimmed to 0~100% of the rated current by applying EXTERNAL VOLTAGE between PC and GND on CN1.</p>    <p>I/P: 230 VAC O/P:TESTING Ta:25°C</p> <table border="1" data-bbox="502 1904 1540 2054"> <thead> <tr> <th>External voltage(DC)</th> <th><0.4V</th> <th>1V</th> <th>2.831V</th> <th>4.7V</th> <th>4.8V</th> </tr> </thead> <tbody> <tr> <td>SPEC(%)</td> <td>0%</td> <td>0%~6%</td> <td>50%±5%</td> <td>100%±5%</td> <td>100%±5%</td> </tr> <tr> <td>Iout(%)</td> <td>0%</td> <td>2.39%</td> <td>50.12%</td> <td>97.02%</td> <td>97.62%</td> </tr> </tbody> </table>	External voltage(DC)	<0.4V	1V	2.831V	4.7V	4.8V	SPEC(%)	0%	0%~6%	50%±5%	100%±5%	100%±5%	Iout(%)	0%	2.39%	50.12%	97.02%	97.62%
External voltage(DC)	<0.4V	1V	2.831V	4.7V	4.8V														
SPEC(%)	0%	0%~6%	50%±5%	100%±5%	100%±5%														
Iout(%)	0%	2.39%	50.12%	97.02%	97.62%														

<p>4</p>	<p>REMOTE CONTROL</p>	<p>4.Remote Control</p> <p>※ The power supply can be turned ON/OFF individually or along with other units by using the "Remote Control" function with external switch, potocoupler or relay.</p>  <table border="1" data-bbox="534 537 965 627"> <tr> <td>PSU Vo Status</td> <td>Between +5V-AUX(Pin 2) and R.C(Pin 1)</td> </tr> <tr> <td>Power ON</td> <td>Switch Short</td> </tr> <tr> <td>Power OFF</td> <td>Switch Open</td> </tr> </table> <table border="1" data-bbox="534 649 1396 873"> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>R.C. by external switch.</td> <td>R.C. by user's optocoupler control module.</td> <td>R.C. by user's Relay control module.</td> </tr> </table> <p>I/P: 230 VAC O/P:FULL LOAD Ta:25°C Test Result : PASS</p> <table border="1" data-bbox="502 1019 1228 1131"> <tr> <td>Between +5V-AUX(Pin2) and R.C(Pin1)</td> <td>Power Supply Status</td> </tr> <tr> <td>SW SHORT</td> <td>ON</td> </tr> <tr> <td>SW OPEN</td> <td>OFF</td> </tr> </table>		PSU Vo Status	Between +5V-AUX(Pin 2) and R.C(Pin 1)	Power ON	Switch Short	Power OFF	Switch Open				R.C. by external switch.	R.C. by user's optocoupler control module.	R.C. by user's Relay control module.	Between +5V-AUX(Pin2) and R.C(Pin1)	Power Supply Status	SW SHORT	ON	SW OPEN	OFF
PSU Vo Status	Between +5V-AUX(Pin 2) and R.C(Pin 1)																				
Power ON	Switch Short																				
Power OFF	Switch Open																				
																					
R.C. by external switch.	R.C. by user's optocoupler control module.	R.C. by user's Relay control module.																			
Between +5V-AUX(Pin2) and R.C(Pin1)	Power Supply Status																				
SW SHORT	ON																				
SW OPEN	OFF																				
<p>5</p>	<p>REMOTE SENSE</p>	<p>S+ / S->0.5V Compensate voltage drop on the load wiring up to 0.5V.</p>	<p>I/P: 230 VAC O/P:FULL LOAD Ta:25°C > 0.5 V</p>																		
<p>6</p>	<p>AUXILIARY POWER</p>	<p>1.Auxiliary voltage output, 10.2~13.8V, referenced to GND-AUX (pin2). The maximum load current is 0.8A. This output has the built-in "Oring diodes" and is not controlled by "Remote ON-OFF." 2.Auxiliary voltage output, 4.25~5.75V, referenced to GND-AUX (pin2). The maximum load current is 0.3A. This output has the built-in "Oring diodes" and is not controlled by "Remote ON-OFF"</p> <p>I/P: 230 VAC O/P:FULL LOAD Ta:25°C Test Result : PASS</p> <table border="1" data-bbox="590 1668 1428 1814"> <thead> <tr> <th>AUX</th> <th>TOLERANCE</th> <th>RIPPLE</th> <th>TEST RESULT</th> </tr> </thead> <tbody> <tr> <td>12V / 0.8A</td> <td>10.2~13.8V</td> <td>450mVp-p</td> <td>11.72V/ 80mV</td> </tr> <tr> <td>5V / 0.2A</td> <td>4.25~5.75V</td> <td>150mVp-p</td> <td>4.88V/88 mV</td> </tr> </tbody> </table>		AUX	TOLERANCE	RIPPLE	TEST RESULT	12V / 0.8A	10.2~13.8V	450mVp-p	11.72V/ 80mV	5V / 0.2A	4.25~5.75V	150mVp-p	4.88V/88 mV						
AUX	TOLERANCE	RIPPLE	TEST RESULT																		
12V / 0.8A	10.2~13.8V	450mVp-p	11.72V/ 80mV																		
5V / 0.2A	4.25~5.75V	150mVp-p	4.88V/88 mV																		
<p>7</p>	<p>DC OK SIGNAL</p>	<p>I/P:230VAC O/P: FULL LOAD Ta:25°C TEST : OK</p>																			

8	LED Status indicators	<p>※ LED Status Indicators</p> <table border="1" data-bbox="507 297 1535 1077"> <thead> <tr> <th data-bbox="507 297 978 338">Description</th> <th colspan="2" data-bbox="978 297 1535 338">Output of alarm</th> </tr> </thead> <tbody> <tr> <td data-bbox="507 338 978 421">Normal operation</td> <td data-bbox="978 338 1230 421">Green : Steadily lit</td> <td data-bbox="1230 338 1535 421"></td> </tr> <tr> <td data-bbox="507 421 978 504">Remote off</td> <td data-bbox="978 421 1230 504">Red : Steadily lit</td> <td data-bbox="1230 421 1535 504"></td> </tr> <tr> <td data-bbox="507 504 978 586">Internal over-temperature</td> <td data-bbox="978 504 1230 586">Orange : 1 Blink/Pause</td> <td data-bbox="1230 504 1535 586"> </td> </tr> <tr> <td data-bbox="507 586 978 669">Overload/Short</td> <td data-bbox="978 586 1230 669">Red : 1 Blink/Pause</td> <td data-bbox="1230 586 1535 669"> </td> </tr> <tr> <td data-bbox="507 669 978 752">Over voltage</td> <td data-bbox="978 669 1230 752">Red : 2 Blink/Pause</td> <td data-bbox="1230 669 1535 752"> </td> </tr> <tr> <td data-bbox="507 752 978 835">Over temperature</td> <td data-bbox="978 752 1230 835">Red : 3 Blink/Pause</td> <td data-bbox="1230 752 1535 835"> </td> </tr> <tr> <td data-bbox="507 835 978 918">Fan fail</td> <td data-bbox="978 835 1230 918">Red : 4 Blink/Pause</td> <td data-bbox="1230 835 1535 918"> </td> </tr> <tr> <td data-bbox="507 918 978 1001">AC under voltage</td> <td data-bbox="978 918 1230 1001">Red : 5 Blink/Pause</td> <td data-bbox="1230 918 1535 1001"> </td> </tr> <tr> <td data-bbox="507 1001 978 1077">Others (Note)</td> <td data-bbox="978 1001 1230 1077">Red : 6 Blink/Pause</td> <td data-bbox="1230 1001 1535 1077"> </td> </tr> </tbody> </table> <p data-bbox="507 1093 1455 1144">Note: 1. Others include hardware fault etc. 2. In PC mode, both OLP and SCP operate in constant current limiting, with the indicator steadily lit green.</p> <p data-bbox="507 1151 671 1290">I/P:230VAC O/P:FULL LOAD Ta:25°C TEST : NOTE12</p>			Description	Output of alarm		Normal operation	Green : Steadily lit		Remote off	Red : Steadily lit		Internal over-temperature	Orange : 1 Blink/Pause	 	Overload/Short	Red : 1 Blink/Pause	 	Over voltage	Red : 2 Blink/Pause	 	Over temperature	Red : 3 Blink/Pause	 	Fan fail	Red : 4 Blink/Pause	 	AC under voltage	Red : 5 Blink/Pause	 	Others (Note)	Red : 6 Blink/Pause	 
Description	Output of alarm																																	
Normal operation	Green : Steadily lit																																	
Remote off	Red : Steadily lit																																	
Internal over-temperature	Orange : 1 Blink/Pause	 																																
Overload/Short	Red : 1 Blink/Pause	 																																
Over voltage	Red : 2 Blink/Pause	 																																
Over temperature	Red : 3 Blink/Pause	 																																
Fan fail	Red : 4 Blink/Pause	 																																
AC under voltage	Red : 5 Blink/Pause	 																																
Others (Note)	Red : 6 Blink/Pause	 																																
9	FAN NOISE (Typ.)	<p>10% load @18 dB 70% load @24 dB</p> <p>Built-in intelligent fan speed control detect by PSU' S internal temperature</p>	<p>I/P : 230 VAC O/P : TESTING Ta : 25°C</p>	<p>10% load: 16.27dB 70% load: 21.88dB</p>																														

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q53 Rated: 650V/33.7A	AC ON/OFF I/P:High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8)0%~150%LOAD (9)0%LOAD~SHORT I/P:Low-Line -3V = 82V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	VDS: (1) 444V (2) 448V (3) 448V (4) 444V (5) 444V (6) 448V (7) 460V (8) 32.1V (9) 35.2V VDS: (1) 497V (2) 473V (3) 493V (4) 493V (5) 497V (6) 465V (7) 473V
2	Diode Peak Voltage	Q100 Rated: 72A/300V Q103 Rated: 72A/300V	AC ON/OFF I/P:High-Line +3V =308 V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	Q100: VDS: (1) 236V (2) 248V (3) 244V (4) 234V (5) 236V (6) 250V (7) 240V (8) 258V

				<p>Q103:</p> <p>VDS:</p> <p>(1) 243V</p> <p>(2) 240V</p> <p>(3) 248V</p> <p>(4) 238V</p> <p>(5) 240V</p> <p>(6) 248V</p> <p>(7) 252V</p> <p>(8) 250V</p>
3	Input Capacitor Voltage	<p>C5 Rated:</p> <p>470μ/450V</p> <p>Surge voltage: 495V</p>	<p>I/P:High-Line +3V =308V</p> <p>O/P: (1)Full Load input on/off</p> <p>(2) Min load input on /Off</p> <p>(3)Full Load /Min load Change</p> <p>(4)Full load continue</p> <p>Ta:25°C</p>	<p>(1)452V</p> <p>(2)440V</p> <p>(3)456V</p> <p>(4) 452V</p>
4	Control IC Voltage Test	<p>PWM IC U500</p> <p>Rated: 8V~ 30 V</p> <p>PFC IC U1</p> <p>Rated: 11.9V~ 25V</p> <p>O/P IC U100</p> <p>Rated: 4.2 V~ 30 V</p>	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =308 V</p> <p>O/P(1)FULL LOAD</p> <p>(2) Output Short</p> <p>(3)O.L.P</p> <p>(4)O.V.P.</p> <p>(5)NO LOAD VRmin(Low LINE)</p> <p>Ta:25°C</p>	<p>U500</p> <p>(1) 17.5V</p> <p>(2) 17.7V</p> <p>(3) 17.5V</p> <p>(4) 17.9V</p> <p>(5) 17.7V</p> <p>U1</p> <p>(1) 18.4V</p> <p>(2) 18.5V</p> <p>(3) 18.5V</p> <p>(4) 18.7V</p> <p>(5) 19.1V</p> <p>U100</p> <p>(1) 12.5V</p> <p>(2) 12.3V</p> <p>(3) 12.5V</p> <p>(4) 12.3V</p> <p>(5) 12.4V</p>
5	TOP SWITCHING STAND BY POWER	<p>Q500</p> <p>Rated:7A/ 700V</p>	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =308V</p> <p>O/P: (1)Full Load</p> <p>(2)Remote On/Off</p> <p>I/P:Low-Line -3V =82 V</p> <p>O/P: (1)Full Load</p> <p>(2)Remote On/Off</p> <p>Ta:25°C</p>	<p>(1) 578V</p> <p>(2) 586V</p> <p>(1) 606V</p> <p>(2) 606V</p>

■ SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4 K VAC/min I/P-FG : 2 K VAC/min O/P-FG: 1.5 KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P: 3.64 mA I/P-FG: 2.40 mA O/P-FG: 2.62 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500 VDC>100MΩ I/P-FG: 500 VDC>100MΩ O/P-FG: 500 VDC >100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: >9999 MΩ I/P-FG: >9999 MΩ O/P-FG: >9999 MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	16 mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55032 EN55014-1 EN55011	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55032 EN55014-1 EN55011	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																								
1	TEMPERATURE RISE TEST	MODEL : NSP-1000-60 1. ROOM AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta= 30.6 °C 2. HIGH AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta= 63 °C																																																																																																										
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=30.9 °C</th> <th>HIGH AMBIENT Ta=63 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF2</td><td>39.1°C</td><td>71.5°C</td></tr> <tr><td>2</td><td>BD1</td><td>52.9°C</td><td>85.3°C</td></tr> <tr><td>3</td><td>Q1</td><td>56.0°C</td><td>88.4°C</td></tr> <tr><td>4</td><td>D4</td><td>51.9°C</td><td>84.3°C</td></tr> <tr><td>5</td><td>L1</td><td>45.1°C</td><td>77.5°C</td></tr> <tr><td>6</td><td>C5</td><td>40.3°C</td><td>72.7°C</td></tr> <tr><td>7</td><td>U1</td><td>45.0°C</td><td>77.4°C</td></tr> <tr><td>8</td><td>U2</td><td>49.2°C</td><td>81.6°C</td></tr> <tr><td>9</td><td>Q50</td><td>55.4°C</td><td>87.8°C</td></tr> <tr><td>10</td><td>Q51</td><td>54.6°C</td><td>87.0°C</td></tr> <tr><td>11</td><td>Q52</td><td>47.5°C</td><td>79.9°C</td></tr> <tr><td>12</td><td>Q53</td><td>47.6°C</td><td>80.0°C</td></tr> <tr><td>13</td><td>L3</td><td>80.9°C</td><td>113.3°C</td></tr> <tr><td>14</td><td>T1</td><td>86.9°C</td><td>119.3°C</td></tr> <tr><td>15</td><td>D100</td><td>74.5°C</td><td>106.9°C</td></tr> <tr><td>16</td><td>L100</td><td>55.0°C</td><td>87.4°C</td></tr> <tr><td>17</td><td>C110</td><td>43.9°C</td><td>76.3°C</td></tr> <tr><td>18</td><td>U100</td><td>63.1°C</td><td>95.5°C</td></tr> <tr><td>19</td><td>Q102</td><td>51.5°C</td><td>83.9°C</td></tr> <tr><td>20</td><td>R118</td><td>77.5°C</td><td>109.9°C</td></tr> <tr><td>21</td><td>RTH5</td><td>39.1°C</td><td>71.5°C</td></tr> <tr><td>22</td><td>RTH6</td><td>49.9°C</td><td>82.3°C</td></tr> <tr><td>23</td><td>RT31</td><td>47.2°C</td><td>79.6°C</td></tr> <tr><td>24</td><td>RT32</td><td>45.3°C</td><td>77.7°C</td></tr> <tr><td>25</td><td>C14</td><td>38.8°C</td><td>71.2°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=30.9 °C	HIGH AMBIENT Ta=63 °C	1	LF2	39.1°C	71.5°C	2	BD1	52.9°C	85.3°C	3	Q1	56.0°C	88.4°C	4	D4	51.9°C	84.3°C	5	L1	45.1°C	77.5°C	6	C5	40.3°C	72.7°C	7	U1	45.0°C	77.4°C	8	U2	49.2°C	81.6°C	9	Q50	55.4°C	87.8°C	10	Q51	54.6°C	87.0°C	11	Q52	47.5°C	79.9°C	12	Q53	47.6°C	80.0°C	13	L3	80.9°C	113.3°C	14	T1	86.9°C	119.3°C	15	D100	74.5°C	106.9°C	16	L100	55.0°C	87.4°C	17	C110	43.9°C	76.3°C	18	U100	63.1°C	95.5°C	19	Q102	51.5°C	83.9°C	20	R118	77.5°C	109.9°C	21	RTH5	39.1°C	71.5°C	22	RTH6	49.9°C	82.3°C	23	RT31	47.2°C	79.6°C	24	RT32	45.3°C	77.7°C	25	C14	38.8°C	71.2°C
NO	Position	ROOM AMBIENT Ta=30.9 °C	HIGH AMBIENT Ta=63 °C																																																																																																									
1	LF2	39.1°C	71.5°C																																																																																																									
2	BD1	52.9°C	85.3°C																																																																																																									
3	Q1	56.0°C	88.4°C																																																																																																									
4	D4	51.9°C	84.3°C																																																																																																									
5	L1	45.1°C	77.5°C																																																																																																									
6	C5	40.3°C	72.7°C																																																																																																									
7	U1	45.0°C	77.4°C																																																																																																									
8	U2	49.2°C	81.6°C																																																																																																									
9	Q50	55.4°C	87.8°C																																																																																																									
10	Q51	54.6°C	87.0°C																																																																																																									
11	Q52	47.5°C	79.9°C																																																																																																									
12	Q53	47.6°C	80.0°C																																																																																																									
13	L3	80.9°C	113.3°C																																																																																																									
14	T1	86.9°C	119.3°C																																																																																																									
15	D100	74.5°C	106.9°C																																																																																																									
16	L100	55.0°C	87.4°C																																																																																																									
17	C110	43.9°C	76.3°C																																																																																																									
18	U100	63.1°C	95.5°C																																																																																																									
19	Q102	51.5°C	83.9°C																																																																																																									
20	R118	77.5°C	109.9°C																																																																																																									
21	RTH5	39.1°C	71.5°C																																																																																																									
22	RTH6	49.9°C	82.3°C																																																																																																									
23	RT31	47.2°C	79.6°C																																																																																																									
24	RT32	45.3°C	77.7°C																																																																																																									
25	C14	38.8°C	71.2°C																																																																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 108 % LOAD Ta : 25°C	TEST : OK																																																																																																								
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 60%/ 100 % LOAD Ta= -45/-35 °C	TEST : OK																																																																																																								



4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C/95 %R.H NO DAMAGE	I/P : 315 VAC O/P : FULL LOAD Ta= 65 °C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	±0.03 %/°C(0~60°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.003 %/°C(0~60°C)
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/output condition : STATIC	
7	THERMAL SHOCK TEST	-30~60°C	1. Thermal shock Temperature : -35°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	(1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C110 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta=25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=60 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=60 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta=60 °C LIFE TIME	(1) 980546HRS (2) 127773HRS (3) 167307HRS (4) 207469HRS	
10	MTBF	Conducted by Parts Stress Analysis Prediction 910.8K hrs min. Telcordia SR-332 (Bellcore) ; 87.5K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQIN/ZHOUBIAO	WENF	WUWQ

2020.10.1 TAG-QA-009